

SDC SECURITY DOOR CONTROLS

3580 Willow Lane, Westlake Village, CA 91361-4921 • (805) 494-0622 • Fax: (805) 494-8861
www.sdcsecurity.com • E-mail: service@sdsecurity.com

INSTALLATION INSTRUCTIONS MODEL 422 PUSH SWITCH





422GPE



422NGPE

Electrical Specifications

Contact Type: SPDT (Form C)
Contact Ratings: 30VDC @ 5 AMPS
(Resistive)

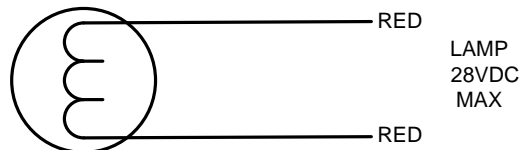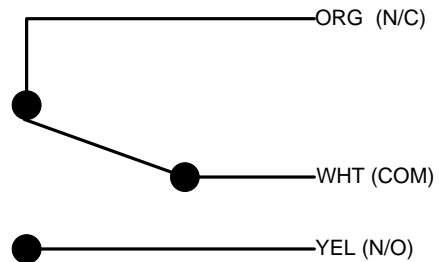


SDC SECURITY DOOR CONTROLS

3580 Willow Lane, Westlake Village, CA 91361-4921 • (805) 494-0622 • Fax: (805) 494-8861
 www.sdcsecurity.com • E-mail: service@sdsecurity.com

INSTALLATION INSTRUCTIONS MODEL 413 & 423 PUSH SWITCH 30 SECOND TIME DELAY



This push to exit button is specifically intended for installation on Access Controlled Egress doors as described in the Boca code. A motion detector is the primary means of releasing a magnetic lock on the door. The push to exit button is intended, as a back up means of releasing the lock in the event there is a problem with the motion detector. When the button is pressed, the lock releases for 30-seconds. If pressed again during the 30-seconds lock release period, the unit will "Retrigger" starting a new 30-second lock release period.

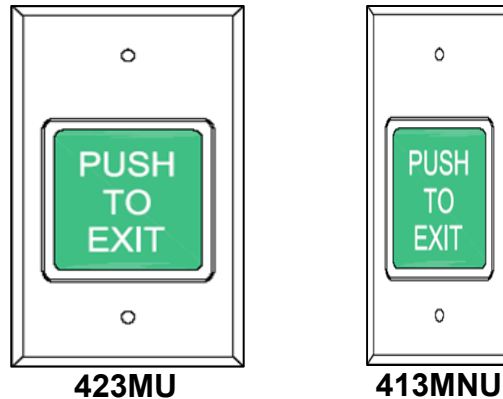

Electrical Specifications

Input Voltage: 12/24VDC
 Timer Current Draw: 20 ma
 Lamp Voltage: 28V @ 35ma

Output Voltage: 12/24VDC (Same as Input Voltage)
 Max Output Load: 30VDC @ 2 AMP

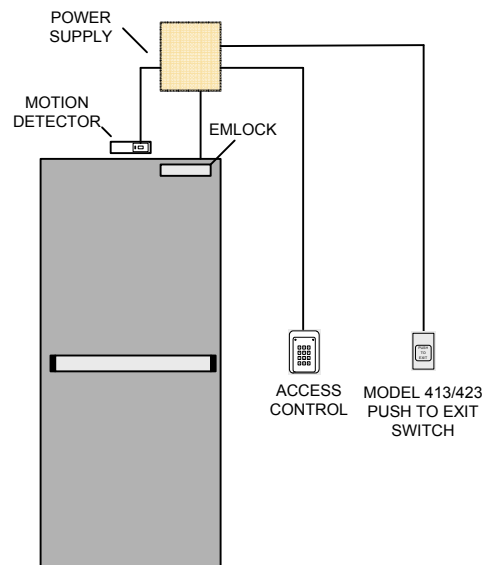
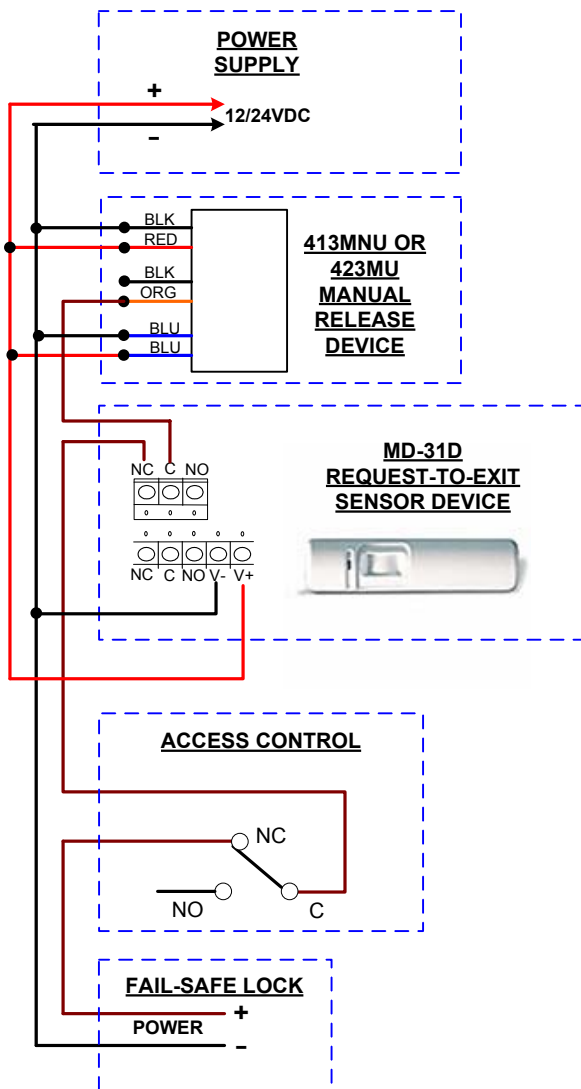


Any suggestions or comments to this instruction or product are welcome. Please contact us through our website or email engineer@sdsecurity.com

SDC Security Door Controls

3580 Willow Lane, Westlake Village, CA 91361-4921 • (805) 494-0622 • Fax: (805) 494-8861
 www.sdcsecurity.com • E-mail: service@sdsecurity.com

INSTALLATION INSTRUCTIONS MODEL 460 REQUEST – TO – EXIT - SWITCH

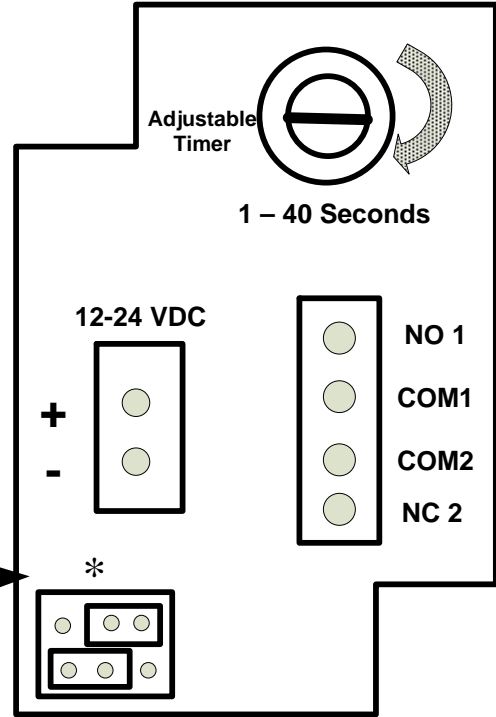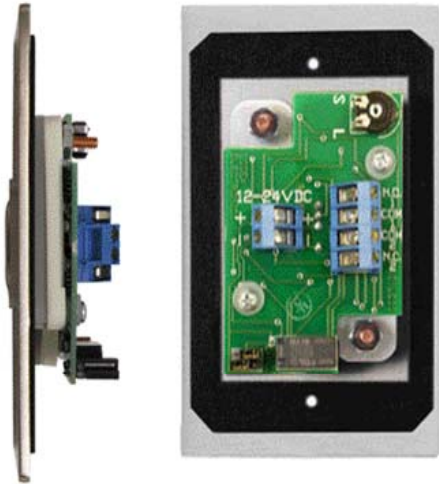

Specifications

Input Voltage: 12/24VDC

Current:

LED On: Idle-60mA, Active 120mA
 LED Off: Idle-10mA, Active-60mA

Outputs:

1 N.O., 1 N.C., 2 Amp @ 30VDC


Switch Operating Environment

-40° F to +160°F (-40° C to +70°C)


Dimensions

4.5" H x 2.75" W x 1.25" D
 (11.4 x 7 x 3.2 cm)


Selectable Bi-color Illumination Status
 Relay Off – Red, Green or None
 Relay On – Red, Green or None



**Red On – Standby
 Green On – Relay Action**



**Red On – Relay Active
 Green On - Standby**



**Red Off
 Green Off**