


Non-Spring Return Direct Coupled Actuators (DCA)

MN6105, MN6110, MN7505, MN7510

INSTALLATION INSTRUCTIONS

DISCONNECT POWER BEFORE INSTALLATION

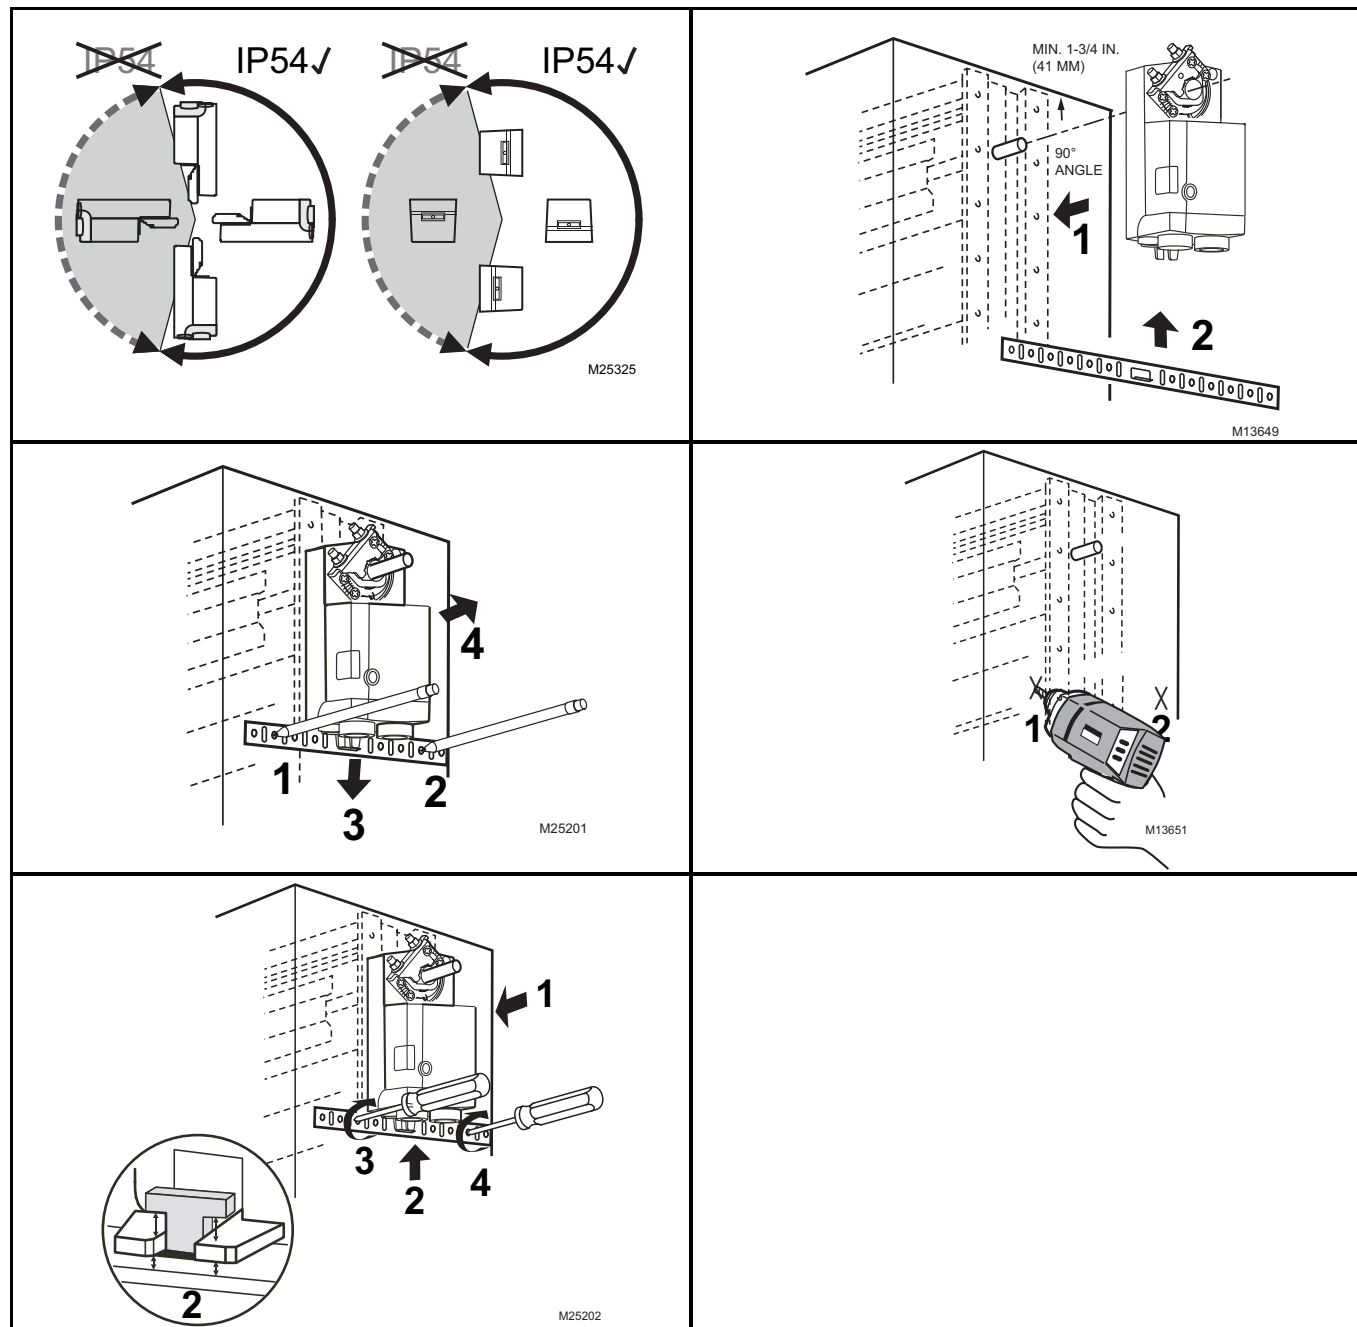

MOUNTING

On counterclockwise (CCW) or clockwise (CW) closing damper.


CCW-CLOSING DAMPER M25203	CW-CLOSING DAMPER M25204	OPTIONAL STEP M25205
--	---	---

For models without cables

M25206	REMOVABLE ACCESS COVER M25207	M25208
M25209	M25210	M25218

WIRING

Typical Wiring Without Cables

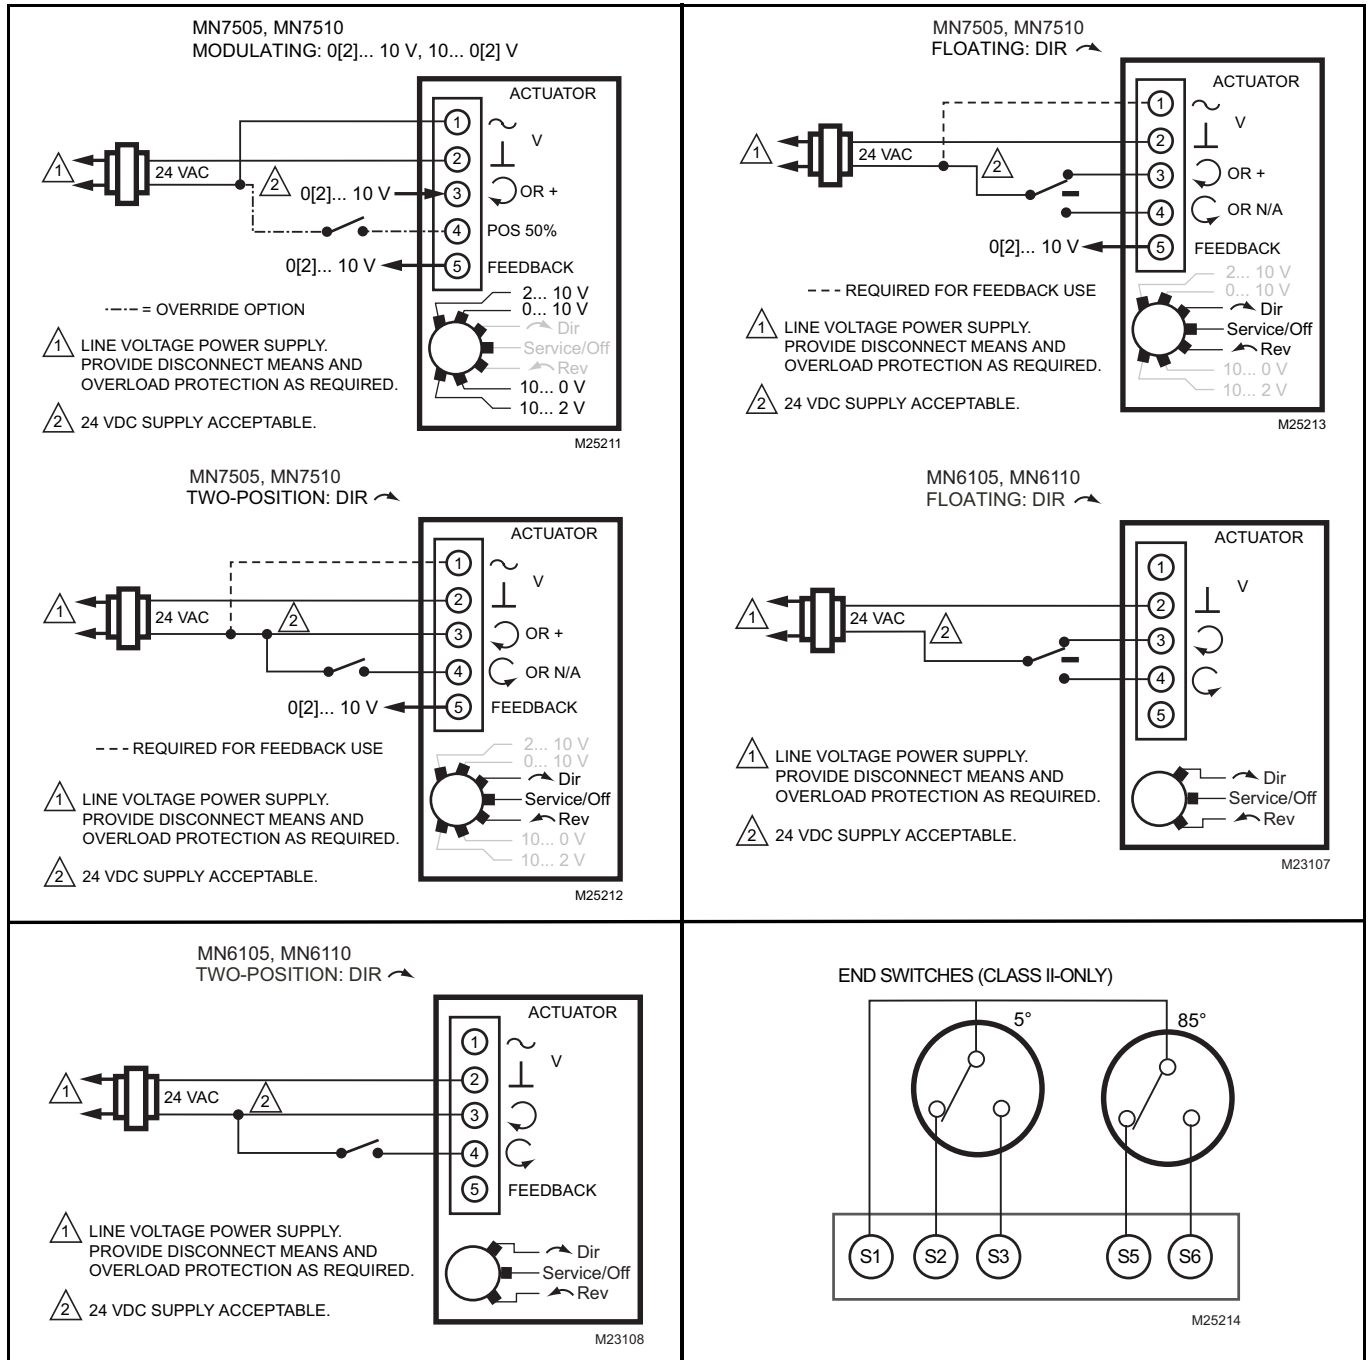

Typical Wiring With Cables

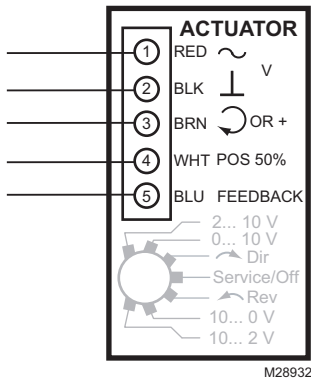


Fig. 1. MN7505W2001 Floating Modulating Two Position.


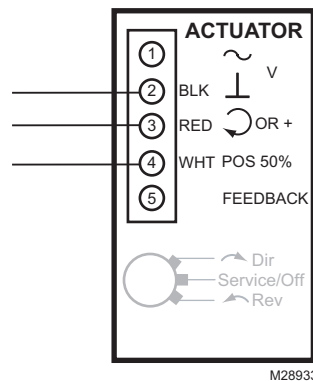


Fig. 2. MN6105W1011 Two Position Floating.

ADJUSTING

For Counterclockwise (CCW) or Clockwise (CW) Closing Damper/Synchronization

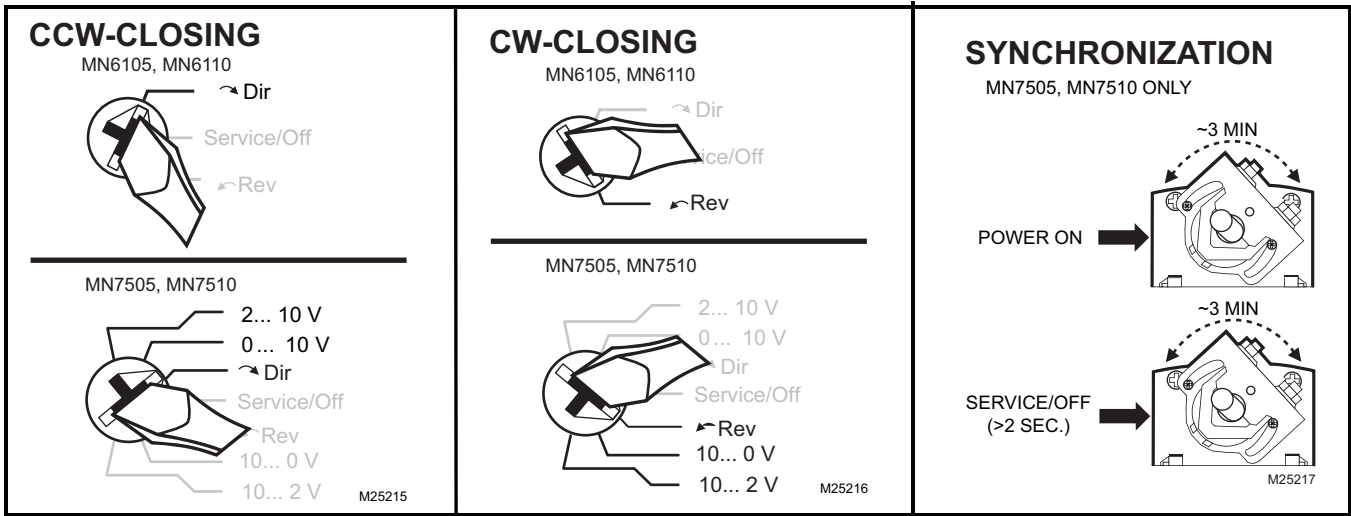

Automation and Control Solutions
Honeywell International Inc.
1985 Douglas Drive North
Golden Valley, MN 55422

Honeywell Limited-Honeywell Limitée
35 Dynamic Drive
Toronto, Ontario M1V 4Z9
customer.honeywell.com

Honeywell

© U.S. Registered Trademark
© 2010 Honeywell International Inc.
62-0224—05 M.S. Rev. 10-10
Printed in U.S.A.