

4-20 mA Module

(Part No. 125100-1)



4-20 mA
Module
Installed

Combine the 4-20 mA Module with an Industrial Grade Turbine and Computer Electronics to provide an industry standard analog signal for connection to a wide variety of chart recorders, display equipment and process control equipment.

This module outputs an analog signal which is directly proportional to the frequency of the digital output. With some simple adjustments, you can scale the module to represent whatever range is desired. Kit comes with circuit, assembly, enclosure and screws.

Features and Benefits:

- ✓ Communicates with most analog process control devices.
- ✓ Operating temperature range of +14° F to +140° F (-10° C to +60° C).
- ✓ Module installs on all turbine sizes.
- ✓ Provides external power to computer electronics.


SPECIFICATIONS

Signal Type:	Analog
Power:	Loop Powered
Voltage:	7 to 30 VDC
Strain Relief:	Hubble PG7
Cable:	10 ft. (3 m), Belden #9363



Pulse Access Module

(Part No. 125060-1)

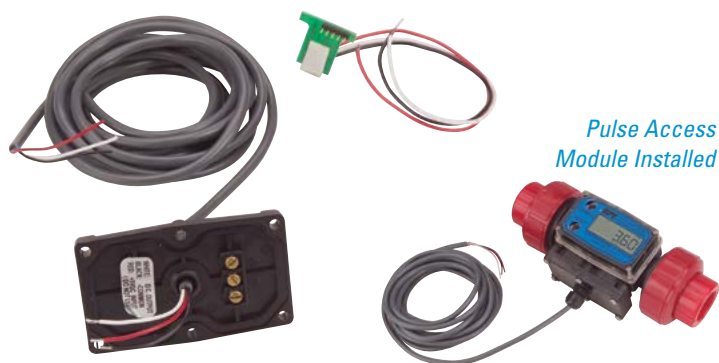

Pulse Access
Module Installed

The Pulse Access Module provides an unscaled, digital signal from your FLOMEC® meter by accessing circuitry from the on-board computer readout.

This kit comes complete, ready to install, with a circuit assembly, coverplate assembly and 10 ft. of cable.

The Pulse Access Module requires both a FLOMEC Turbine and an 09 Computer Electronics which are sold separately.

Features and Benefits:

- ✓ Provides a digital Open Collector signal.
- ✓ Operating temperature range of +14° F to +140° F (-10° C to +60° C).
- ✓ Can transmit signal up to 5,000 ft. (1.5 km).
- ✓ Communicates with most digital process control devices and its easy to install.

SPECIFICATIONS

Signal Type:	Open Collector (NPN)
Voltage:	0 to 60 VDC
Frequency:	0 to 750 Hz
Strain Relief:	Hubble PG7
Cable:	10 ft. (3 m) Belden #9363

APPROVALS

