

LIGHTING CONTROLS

LIGHTING OVERRIDE SWITCHES

CLLV-SW



DESCRIPTION

The **CLLV-SW** lighting override switch is a low voltage input into a lighting control panel. Each button registers a solid, audible click when pushed.

FEATURES

- Switch fits a single gang electrical box
- Includes white wall plate
- One or two button
- Digital input

NEW!



CLLV-SW1




CLLV-SW2

SPECIFICATIONS

Contact Rating	24 VDC
Contact Type	Momentary (digital input only)
Life Rating	1,000,000 mechanical operations
Operating Temperature	14° to 160°F (-10° to 71.1°C)
Operating Humidity	20%-95% RH, non-condensing
Color	White
Dimensions	4.1" H x 1.5" W x 10" D (10.3 x 3.8 x 2.5 cm)
Materials Of Construction	Plastic
Weight	0.06 lb (0.03 kg)
Warranty	2 years

WIRING

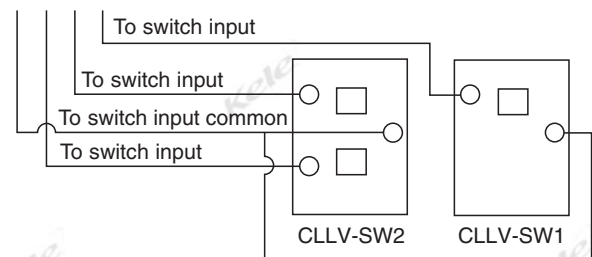

ORDERING INFORMATION

MODEL	DESCRIPTION		
CLLV-SW1	1 button, low voltage momentary switch without wall plate	CLLV-SW1P	1 Button, Low voltage momentary switch with white wall plate
CLLV-SW2	2 button, low voltage momentary switch without wall plate	CLLV-SW2P	2 Button, Low voltage momentary switch with white wall plate

11

LIGHTING CONTROLS