

## Product data sheet

### Characteristics

# ATV212HD15N4

variable speed drive ATV212 - 15kW - 20hp -  
480V - 3ph - EMC - IP21

Product availability : Stock - Normally stocked in distribution facility



Price\* : 1425.00 USD



### Main

|                              |                                |
|------------------------------|--------------------------------|
| Range of product             | Altivar 212                    |
| Product or component type    | Variable speed drive           |
| Device short name            | ATV212                         |
| Product destination          | Asynchronous motors            |
| Product specific application | Pumps and fans in HVAC         |
| Assembly style               | With heat sink                 |
| Phase                        | 3 phases                       |
| Motor power kW               | 15 kW                          |
| Motor power hp               | 20 hp                          |
| [Us] rated supply voltage    | 380...480 V - 15...10 %        |
| Supply voltage limits        | 323...528 V                    |
| Supply frequency             | 50...60 Hz - 5...5 %           |
| Network frequency            | 47.5...63 Hz                   |
| EMC filter                   | Class C2 EMC filter integrated |
| Line current                 | 22.8 A 480 V<br>28.5 A 380 V   |

### Complementary

|                                  |                                                           |
|----------------------------------|-----------------------------------------------------------|
| Apparent power                   | 23.2 kVA 380 V                                            |
| Prospective line I <sub>sc</sub> | 22 kA                                                     |
| Continuous output current        | 30.5 A 380 V<br>30.5 A 460 V                              |
| Maximum transient current        | 33.6 A 60 s                                               |
| Speed drive output frequency     | 0.5...200 Hz                                              |
| Nominal switching frequency      | 12 kHz                                                    |
| Switching frequency              | 12...16 kHz with derating factor<br>6...16 kHz adjustable |

|                                    |                                                                                                                                                                                                                                                             |
|------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Speed range                        | 1...10                                                                                                                                                                                                                                                      |
| Speed accuracy                     | +/- 10 % of nominal slip 0.2 Tn to Tn                                                                                                                                                                                                                       |
| Torque accuracy                    | +/- 15 %                                                                                                                                                                                                                                                    |
| Transient overtorque               | 120 % of nominal motor torque +/- 10 % 60 s                                                                                                                                                                                                                 |
| Asynchronous motor control profile | Voltage/Frequency ratio, 2 points<br>Voltage/Frequency ratio, 5 points<br>Flux vector control without sensor, standard<br>Voltage/Frequency ratio - Energy Saving, quadratic U/f<br>Voltage/Frequency ratio, automatic IR compensation (U/f + automatic Uo) |
| Regulation loop                    | Adjustable PI regulator                                                                                                                                                                                                                                     |
| Motor slip compensation            | Adjustable<br>Automatic whatever the load<br>Not available in voltage/frequency ratio motor control                                                                                                                                                         |
| Local signalling                   | 1 LED red DC bus energized                                                                                                                                                                                                                                  |
| Output voltage                     | <= power supply voltage                                                                                                                                                                                                                                     |
| Isolation                          | Electrical between power and control                                                                                                                                                                                                                        |
| Type of cable                      | IEC cable without mounting kit 1 113 °F (45 °C) copper 90 °C XLPE/EPR<br>IEC cable without mounting kit 1 45 °C copper 70 °C PVC<br>UL 508 cable with UL Type 1 kit 3 40 °C copper 75 °C PVC                                                                |
| Electrical connection              | Terminal 0 in <sup>2</sup> (2.5 mm <sup>2</sup> ) AWG 14 VIA, VIB, FM, FLA, FLB, FLC, RY, RC, F, R, RES<br>Terminal 25 mm <sup>2</sup> AWG 3 L1/R, L2/S, L3/T                                                                                               |
| Tightening torque                  | 39.82 lbf.in (4.5 N.m) 40 lb.in L1/R, L2/S, L3/T<br>0.6 N.m VIA, VIB, FM, FLA, FLB, FLC, RY, RC, F, R, RES                                                                                                                                                  |
| Supply                             | Internal supply for reference potentiometer (1 to 10 kOhm) 10.5 V DC +/- 5 % <= 10 A overload and short-circuit protection<br>Internal supply 24 V DC 21...27 V <= 200 A overload and short-circuit protection                                              |
| Analogue input number              | 2                                                                                                                                                                                                                                                           |
| Analogue input type                | Switch-configurable voltage VIA 0...10 V DC 24 V max 30000 Ohm 10 bits<br>Configurable voltage VIB 0...10 V DC 24 V max 30000 Ohm 10 bits<br>Configurable PTC probe VIB 0...6 probes 1500 Ohm<br>Switch-configurable current VIA 0...20 mA 250 Ohm 10 bits  |
| Sampling duration                  | 2 ms +/- 0.5 ms F discrete<br>2 ms +/- 0.5 ms R discrete<br>2 ms +/- 0.5 ms RES discrete<br>3.5 ms +/- 0.5 ms VIA analog<br>22 ms +/- 0.5 ms VIB analog                                                                                                     |
| Response time                      | 2 ms +/- 0.5 ms FM analog<br>7 ms +/- 0.5 ms FLA, FLC discrete<br>7 ms +/- 0.5 ms FLB, FLC discrete<br>7 ms +/- 0.5 ms RY, RC discrete                                                                                                                      |
| Accuracy                           | +/- 0.6 % VIA for a temperature variation 60 °C<br>+/- 0.6 % VIB for a temperature variation 60 °C<br>+/- 1 % FM for a temperature variation 60 °C                                                                                                          |
| Linearity error                    | +/- 0.15 % of maximum value input VIA<br>+/- 0.15 % of maximum value input VIB<br>+/- 0.2 % output FM                                                                                                                                                       |
| Analogue output number             | 1                                                                                                                                                                                                                                                           |
| Analogue output type               | Switch-configurable voltage FM 0...10 V DC 7620 Ohm 10 bits<br>Switch-configurable current FM 0...20 mA 970 Ohm 10 bits                                                                                                                                     |
| Discrete output number             | 2                                                                                                                                                                                                                                                           |
| Discrete output type               | Configurable relay logic FLA, FLC NO 100000 cycles<br>Configurable relay logic FLB, FLC NC 100000 cycles<br>Configurable relay logic RY, RC NO 100000 cycles                                                                                                |
| Minimum switching current          | 3 mA 24 V DC configurable relay logic                                                                                                                                                                                                                       |
| Maximum switching current          | 5 A 250 V AC resistive cos phi = 1 L/R = 0 ms FL, R<br>5 A 30 V DC resistive cos phi = 1 L/R = 0 ms FL, R<br>2 A 250 V AC inductive cos phi = 0.4 L/R = 7 ms FL, R<br>2 A 30 V DC inductive cos phi = 0.4 L/R = 7 ms FL, R                                  |
| Discrete input type                | Programmable F 24 V DC level 1 PLC 4700 Ohm<br>Programmable R 24 V DC level 1 PLC 4700 Ohm<br>Programmable RES 24 V DC level 1 PLC 4700 Ohm                                                                                                                 |
| Discrete input logic               | Positive logic (source) F, R, RES <= 5 V >= 11 V<br>Negative logic (sink) F, R, RES >= 16 V <= 10 V                                                                                                                                                         |

|                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Acceleration and deceleration ramps | Automatic based on the load<br>Linear adjustable separately from 0.01 to 3200 s                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Braking to standstill               | By DC injection                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Protection type                     | Motor phase break motor<br>Break on the control circuit drive<br>Thermal power stage drive<br>Overvoltages on the DC bus drive<br>Against exceeding limit speed drive<br>Against input phase loss drive<br>With PTC probes motor<br>Input phase breaks drive<br>Line supply overvoltage and undervoltage drive<br>Line supply undervoltage drive<br>Overcurrent between output phases and earth drive<br>Overheating protection drive<br>Short-circuit between motor phases drive<br>Thermal protection motor |
| Dielectric strength                 | 3535 V DC between earth and power terminals<br>5092 V DC between control and power terminals                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Insulation resistance               | >= 1 MOhm 500 V DC for 1 minute                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Frequency resolution                | 0.024/50 Hz analog input<br>0.1 Hz display unit                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Communication port protocol         | APOGEE FLN<br>BACnet<br>LonWorks<br>METASYS N2<br>Modbus                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Connector type                      | 1 RJ45<br>1 open style                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Physical interface                  | 2-wire RS 485                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Transmission frame                  | RTU                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Transmission rate                   | 9600 bps or 19200 bps                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Data format                         | 8 bits, 1 stop, odd even or no configurable parity                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Type of polarization                | No impedance                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Number of addresses                 | 1...247                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Communication service               | Monitoring inhibitable<br>Read device identification (43)<br>Read holding registers (03) 2 words maximum<br>Time out setting from 0.1 to 100 s<br>Write multiple registers (16) 2 words maximum<br>Write single register (06)                                                                                                                                                                                                                                                                                 |
| Option card                         | Communication card LonWorks                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Operating position                  | Vertical +/- 10 degree                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Width                               | 9.65 in (245 mm)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Height                              | 12.99 in (330 mm)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Depth                               | 7.48 in (190 mm)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Product weight                      | 25.68 lb(US) (11.65 kg)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Power dissipation in W              | 625 W                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Air flow                            | 54420.42 Gal/hr(US) (206 m3/h)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Functionality                       | Mid                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Specific application                | HVAC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| IP degree of protection             | IP21                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Discrete and process manufacturing  | Building - HVAC : compressor for scroll<br>Building - HVAC : fan<br>Building - HVAC : pump                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Power range                         | 15...25 kW at 380...440 V 3 phases<br>15...25 kW at 480...500 V 3 phases                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Motor starter type                  | Variable speed drive                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |

## Environment

|                               |                                                                                                                              |
|-------------------------------|------------------------------------------------------------------------------------------------------------------------------|
| Electromagnetic compatibility | Conducted radio-frequency immunity test level 3 IEC 61000-4-6<br>Voltage dips and interruptions immunity test IEC 61000-4-11 |
|-------------------------------|------------------------------------------------------------------------------------------------------------------------------|

1.2/50 µs - 8/20 µs surge immunity test level 3 IEC 61000-4-5  
Electrical fast transient/burst immunity test level 4 IEC 61000-4-4  
Electrostatic discharge immunity test level 3 IEC 61000-4-2  
Radiated radio-frequency electromagnetic field immunity test level 3 IEC 61000-4-3

|                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Pollution degree                      | 2 IEC 61800-5-1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| IP degree of protection               | IP20 on upper part without blanking plate on cover EN/IEC 61800-5-1<br>IP20 on upper part without blanking plate on cover EN/IEC 60529<br>IP21 EN/IEC 61800-5-1<br>IP21 EN/IEC 60529<br>IP41 on upper part EN/IEC 61800-5-1<br>IP41 on upper part EN/IEC 60529                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Vibration resistance                  | 1 gn 13...200 Hz EN/IEC 60068-2-8<br>1.5 mm 3...13 Hz EN/IEC 60068-2-6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Shock resistance                      | 15 gn 11 ms IEC 60068-2-27                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Environmental characteristic          | Classes 3C1 IEC 60721-3-3<br>Classes 3S2 IEC 60721-3-3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Noise level                           | 54 dB 86/188/EEC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Operating altitude                    | 3280.84...9842.52 ft (1000...3000 m) limited to 2000 m for the Corner Grounded distribution network with current derating 1 % per 100 m<br><= 3280.84 ft (1000 m) without derating                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Relative humidity                     | 5...95 % without condensation IEC 60068-2-3<br>5...95 % without dripping water IEC 60068-2-3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Ambient air temperature for operation | 14...104 °F (-10...40 °C) without derating<br>> 104...122 °F (> 40...50 °C) with derating factor                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Ambient air temperature for storage   | -13...158 °F (-25...70 °C)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Standards                             | EN 55011 class A group 1<br>EN 61800-3<br>EN 61800-3 category C2<br>EN 61800-3 category C3<br>EN 61800-3 environments 1 category C1<br>EN 61800-3 environments 1 category C2<br>EN 61800-3 environments 1 category C3<br>EN 61800-3 environments 2 category C1<br>EN 61800-3 environments 2 category C2<br>EN 61800-3 environments 2 category C3<br>EN 61800-5-1<br>IEC 61800-3<br>IEC 61800-3 category C2<br>IEC 61800-3 category C3<br>IEC 61800-3 environments 1 category C1<br>IEC 61800-3 environments 1 category C2<br>IEC 61800-3 environments 1 category C3<br>IEC 61800-3 environments 2 category C1<br>IEC 61800-3 environments 2 category C2<br>IEC 61800-3 environments 2 category C3<br>IEC 61800-5-1<br>UL Type 1 |
| Product certifications                | CSA<br>C-Tick<br>NOM 117<br>UL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Marking                               | CE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |

## Ordering and shipping details

|                       |                                   |
|-----------------------|-----------------------------------|
| Category              | 22157 - ATV212 1 - 25 HP 460 VOLT |
| Discount Schedule     | CP4D                              |
| GTIN                  | 00785901944089                    |
| Nbr. of units in pkg. | 1                                 |
| Package weight(Lbs)   | 25.52                             |
| Returnability         | Y                                 |
| Country of origin     | ID                                |

## Offer Sustainability

|                          |                       |
|--------------------------|-----------------------|
| Sustainable offer status | Green Premium product |
|--------------------------|-----------------------|

|                                  |                                                                                                                                                                                                                         |
|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RoHS (date code: YYWW)           | Compliant - since 1051 - Schneider Electric declaration of conformity<br> <a href="#">Schneider Electric declaration of conformity</a> |
| REACH                            | Reference not containing SVHC above the threshold<br><a href="#">Reference not containing SVHC above the threshold</a>                                                                                                  |
| Product environmental profile    | Available<br> <a href="#">Product Environmental Profile</a>                                                                            |
| Product end of life instructions | Available                                                                                                                                                                                                               |
| <b>Contractual warranty</b>      |                                                                                                                                                                                                                         |
| Warranty period                  | 18 months                                                                                                                                                                                                               |

## Dimensions


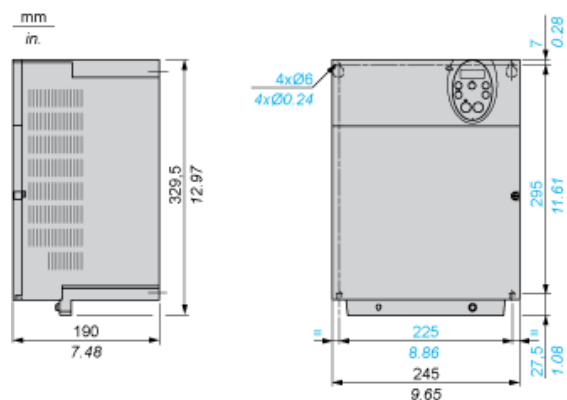


Plate for EMC mounting (supplied with the drive)

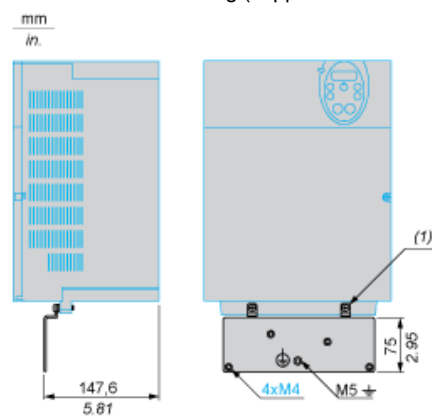

(1) 2 x M5 screws


## Mounting Recommendations

### Clearance

Depending on the conditions in which the drive is to be used, its installation will require certain precautions and the use of appropriate accessories.


Install the unit vertically:

- Do not place it close to heating elements.
- Leave sufficient free space to ensure that the air required for cooling purposes can circulate from bottom to the top of the unit.




### Mounting Types


#### Type A mounting

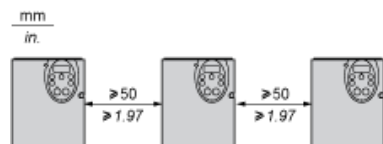

#### Type B mounting



#### Type C mounting

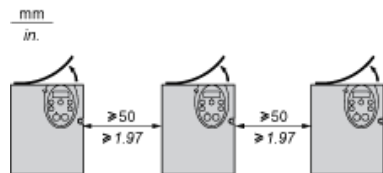

By removing the protective blanking cover from the top of the drive, the degree of protection for the drive becomes IP21. The protective blanking cover may vary according to the drive model, see opposite.

---

## Specific Recommendations for Mounting in an Enclosure

---

To help ensure proper air circulation in the drive:


- Fit ventilation grilles.
- Check that there is sufficient ventilation. If there is not, install a forced ventilation unit with a filter. The openings and/or fans must provide a flow rate at least
- Use special filters with UL Type 12/IP54 protection.
- Remove the blanking cover from the top of the drive.

### Sealed Metal Enclosure (IP54 Degree of Protection)

The drive must be mounted in a dust and damp proof enclosure in certain environmental conditions, such as dust, corrosive gases, high humidity with risk of condensation and dripping water, splashing liquid, etc. This enables the drive to be used in an enclosure where the maximum internal temperature reaches 50°C.

## Recommended Wiring Diagram

### 3-Phase Power Supply

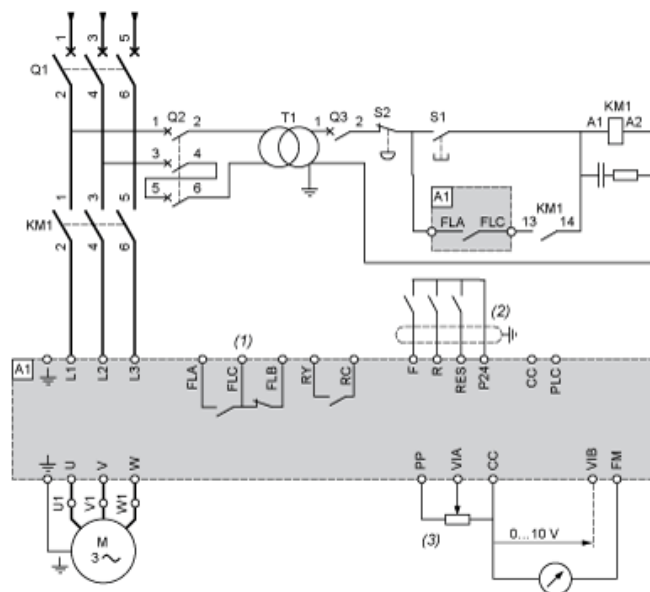

- A1: ATV 212 drive  
 KM1: Contactor  
 Q1: Circuit breaker  
 Q2: GV2 L rated at twice the nominal primary current of T1  
 Q3: GB2CB05  
 S1, S2: XB4 B or XB5 A pushbuttons  
 T1: 100 VA transformer 220 V secondary  
 (1) Fault relay contacts for remote signalling of the drive status  
 (2) Connection of the common for the logic inputs depends on the positioning of the switch (Source, PLC, Sink)  
 (3) Reference potentiometer SZ1RV1202

NOTE: All terminals are located at the bottom of the drive. Install interference suppressors on all inductive circuits near the drive or connected on the same circuit, such as relays, contactors, solenoid valves, fluorescent lighting, etc.

### Switches (Factory Settings)


Voltage/current selection for analog I/O (VIA and VIB)



Voltage/current selection for analog I/O (FM)



Selection of logic type




- (1) negative logic  
 (2) positive logic


Other Possible Wiring Diagrams

Logic Inputs According to the Position of the Logic Type Switch


“Source” position




“Sink” position



“PLC” position with PLC transistor outputs




(1) PLC




(1) PLC

2-wire control




F: Forward  
R: Preset speed  
(2) ATV 212 control terminals

3-wire control



F: Forward  
R: Stop  
RES: Reverse  
(2) ATV 212 control terminals

PTC probe



(2) ATV 212 control terminals  
(3) Motor


Analogue Inputs

Voltage analogue inputs

External +10 V



Analogue input configured for current: 0-20 mA, 4-20 mA, X-Y mA




- (2) ATV 212 control terminals  
(5) Source 0-20 mA, 4-20 mA, X-Y mA

Analogue input VIA configured as positive logic input ("Source" position)



- (2) ATV 212 control terminals


Analogue input VIA configured as negative logic input ("Sink" position)



- (2) ATV 212 control terminals

Derating Curves

The derating curves for the drive nominal current ( $I_n$ ) depend on the temperature, the switching frequency and the mounting type (A, B or C). For intermediate temperatures (45°C for example), interpolate between 2 curves.

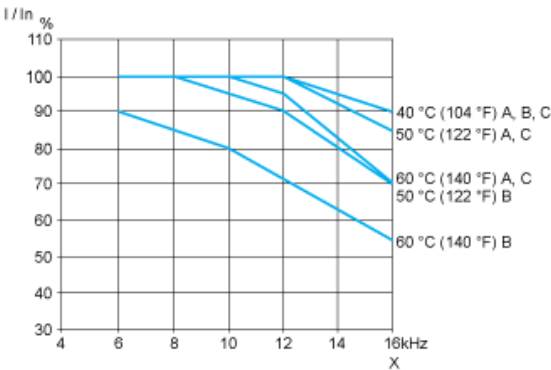

X Switching frequency

## Our Proposal: Circuit Breaker + Contactor + Drive for Motor Power 15 kW and 380 VAC

| Motor power (kW) | ICU (kA) | Breaker                                                                                     | Contactor (*) | Motor Starter |
|------------------|----------|---------------------------------------------------------------------------------------------|---------------|---------------|
| 15               | 50       | <br>GV2L32 | LC1D18P7      | ATV212HD15N4  |

Non contractual pictures.

(\*) You can select the contactor proposed or variants. Please consider examples hereafter or follow the link to the complete offer.

| Motor power kW | Coil voltage VAC - 50/60 Hz | 24 | 48 | 110 | 115 | 220 | 230 | 400 | Other          |
|----------------|-----------------------------|----|----|-----|-----|-----|-----|-----|----------------|
| 15             | LC1D18 ..                   | B7 | E7 | F7  | FE7 | M7  | P7  | V7  | Complete Offer |

| Motor power kW | Coil voltage VDC | 24 | 48 | 110 | 125 | 220 | 230 | Other          |
|----------------|------------------|----|----|-----|-----|-----|-----|----------------|
| 15             | LC1D18 ..        | BD | ED | -   | -   | -   | -   | Complete Offer |

| Motor power kW | Coil voltage Low Consumption VDC - U 0.8...1.25 | 24 | 110 | Other          |
|----------------|-------------------------------------------------|----|-----|----------------|
| 15             | LC1D18 ..                                       | BL | FL  | Complete Offer |