

Features & Options

- 8 Year Battery Life (with two 3.6 volt lithium batteries, full AA size)
- 100 foot range, extendable to 1,000 feet with Repeater
- Transmitted signals can be converted to Voltage, Current or Resistive Outputs for the Controller
- Watertight BAPI-Box Enclosure
- Quick Response Sensor
- Well-vented, Light-Colored Sensor Guard
- Etched Teflon Leadwires
- 2 Year Warranty



**Wireless Outside
Air Temperature
Transmitter**

BAPI Wireless Outside Air Temperature Transmitters Outside Air Units are designed to be mounted outdoors. The 5¼" UV-resistant plastic shield keeps the sensor out of the sunlight and allows for excellent air circulation. The Outside Air Units come with a watertight BAPI-Box enclosure which is made of UV-resistant polycarbonate and carries an IP66 rating. BAPI also offers liquid-tight fittings for the BAPI-Box.

The Wireless Outside Air Temperature Transmitter measures the temperature and transmits the data through 418MHz RF to a receiver. It has a minimum in-building range of 100 feet and an estimated battery life of 8 years using two high-capacity 3.6V lithium batteries with a transmit rate of about once every 10 seconds. Each transmitter has a unique address with built in error detection. Each variable sent by the transmitter is picked up by the receiver and converted by a BAPI Analog Output Module to a voltage, current or resistance signal which is sent to the controller. The unit can be set up to trigger an alarm on the controller when the batteries need replacing.

PART NUMBER: BA/WT-O-BB - Wireless Outside Air Temperature Transmitter

PART NUMBER: BA/LI3620 - Lithium Battery 3.6V

Specifications

Supply Power: Two 3.6V Lithium batteries
8 year battery life at 10 second transmit rate

Inputs: Built in thermistor

Accuracy: $\pm 0.2^{\circ}\text{C}$

Transmitted Range: -40° to 85°C

Enclosure Rating: IP66

Enclosure Material:

UV-Resistant Polycarbonate

Material Rating: UL94 V-0

Environmental Operation Range:

Temp: -40°C to 100°C


Humidity: 0 to 100% RH

Radio Frequency: 418 MHz

Transmitter Interval: ~10 seconds

Antenna: Built inside the enclosure

FCC Approval: FCC ID# T4F16963N16964

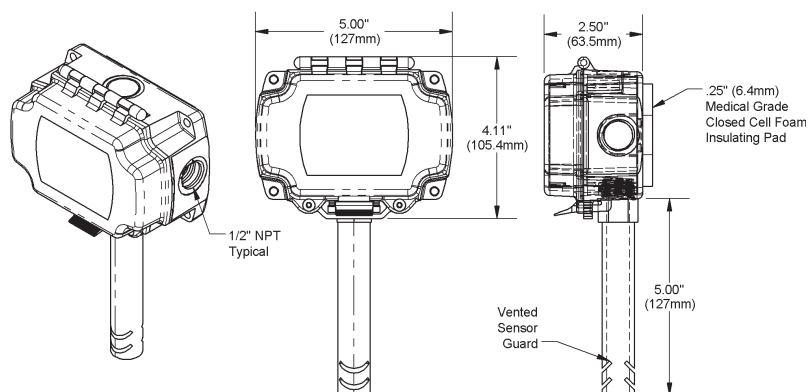

**Wireless Outside Air Temperature unit
in a BAPI-Box (BB) Enclosure**