




## ISOLATION VALVES, FILTERS AND PRESSURE REGULATORS


PV600

### DESCRIPTION

**PV600 Series** air and water two-way isolation valves are rated to 200 psig (1379 kPa) at -40° to 175°F (-40° to 79°C). They are useful in isolating transducers for removal or for bypass operations. They are constructed of a brass body and plastic hand valves. Fittings are 1/8 threaded NPT male or female.

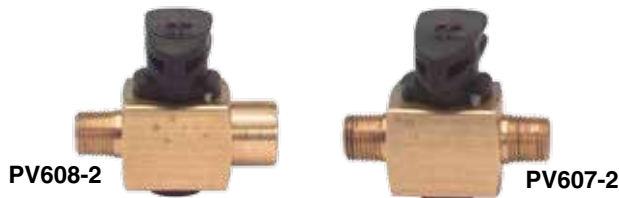

### DIMENSIONS

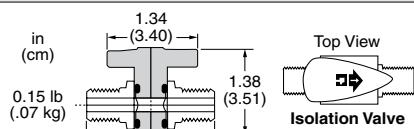

### ORDERING INFORMATION

Model	Description
PV607-2	Male to Male 1/8" NPT isolation valve
PV608-2	Female to Male 1/8" NPT isolation valve

### DESCRIPTION

**K-337** and **K-339** air filters are used to provide clean, oil-free air for pneumatic control systems.

### SPECIFICATIONS

<b>Filter Type</b>	5 micron prefilter, 0.03 micron oil filter, automatic drain
<b>Air Capacity</b>	
<b>K-337</b>	15 scfm (7080 mL/s)
<b>K-339</b>	80 scfm (37,760 mL/s)
<b>Operating Temperature</b>	150°F (65°C) maximum
<b>Maximum Pressure</b>	250 psig (1728 kPa)
<b>Weight</b>	
<b>K-337</b>	5.5 lb (2.5 kg)
<b>K-339</b>	7.0 lb (3.1 kg)
<b>Warranty</b>	1 year



### ORDERING INFORMATION

Model	Description
<b>K-337-1</b>	Air filter, 3/8" ports, 15 scfm capacity
<b>K-339-1</b>	Air filter, 3/4" ports with 1/2" and 1/4" adapters, 80 scfm capacity

### DESCRIPTION

The **K-383**, **K-384** and **K-387** pressure regulators have a large flow capacity to reduce supply air pressure from the compressor down to the requirements of the pneumatic control system. The regulators have 1/8" gauge ports.

### SPECIFICATIONS

<b>Connections</b>	
<b>K-383</b>	1/4" FNPT pipe connection
<b>K-384</b>	1/2" FNPT pipe connection
<b>K-387</b>	3/8" FNPT pipe connection
<b>Output</b>	0-50 psig (0-345 kPa)
<b>Operating Temperature</b>	-40° to 200°F (-40° to 93°C)
<b>Maximum Pressure</b>	400 psig (2,758 kPa)
<b>Weight</b>	
<b>K-383</b>	2.0 lb (1.0 kg)
<b>K-384</b>	3.4 lb (1.3 kg)
<b>K-387</b>	5.0 lb (2.3 kg)
<b>Mounting</b>	Inline piping
<b>Warranty</b>	1 year



### ORDERING INFORMATION

Model	Description
<b>K-383</b>	Pressure regulator, 1/4" pipe, 16 scfm capacity
<b>K-384</b>	Pressure regulator, 1/2" pipe, 32 scfm capacity
<b>K-387</b>	Pressure regulator, 3/8" pipe, 22 scfm capacity

### ACCESSORIES

<b>AL-322</b>	2" gauge, 0-30 psi, center back 1/8" NPT connection
<b>AL-327</b>	2" gauge, 0-100 psi, center back 1/8" NPT connection
<b>K-312</b>	Safety pop-off valve, 1/2" MNPT, 30 psi setpoint, 24 scfm