





UNINTERRUPTIBLE POWER SUPPLY IN KIT

PSH600-UPS-STAT

Kit Consisting of Enclosed Power Control Center Model PSH2C2RB10 (10 Amp Switch / Circuit Breaker, Two (2) 120 Vac Outlets, Terminals, 120 Vac Input) with a 600VA UPS. **(Status Contacts)**

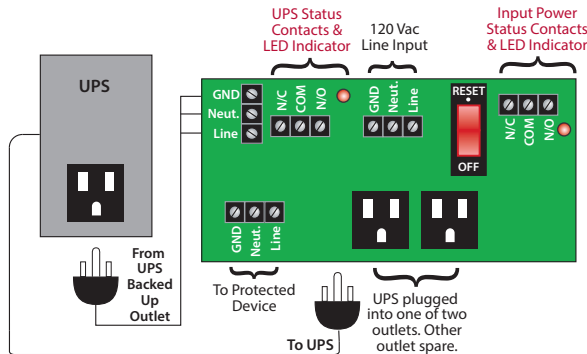

Shown
Without
Cover



Made in USA
Meets
"Buy American"
of ARRA 2009

Shown
With
Cover



SPECIFICATIONS

UPS

UPS: 600VA
Backup Time: 2.5 Min. @ Full 600 VA Load
10.2 Min. @ 1/2 Load
Input: 120 Vac, 12 Amp
Output: 120 Vac, 4.6 Amp
Max Load: 330 Watt
Frequency: 50/60 Hz
Temperature Rating of UPS: 32 to 104° F
UPS Transfer Time: 6ms
Approvals: UL Listed, UL1778
Weight: 8.4 lbs.

PSH2C2RB10

Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Main Breaker ON/OFF: Switch / Breaker (10 Amp)
Approvals: UL Listed, UL916, C-UL, CE, RoHS
Dimensions: 12.000" x 16.000" x 6.000"
Metal Housing with
Screw Cover

Line Input Status Contacts and UPS

Output Status Contacts Rated:

10 Amp @ 277 Vac General Use
10 Amp @ 30 Vdc (N/O)
7 Amp @ 30 Vdc (N/C)
1/2 HP @ 125 Vac
1/4 HP @ 277 Vac
1000 VA @ 120 Vac Magnetic Ballast (N/C)
C300 Pilot Duty
16.8 VA @ 24 Vac Pilot Duty

Notes:

- To order without UPS, so that any other commercial UPS with appropriate ratings and within housing space limitations may be used, see model PSH2C2RB10.
- To order interface board for replacement or for separate use, order model PSMN2C2RB10.
- Average battery life: 3-5 years depending on the number of discharge cycles and environmental temperature**

ESTIMATED BACKUP TIME VS. LOAD

