

ACCESS CONTROL



**EXIT BAR
PSB560V**



1

ACCESS CONTROL

DESCRIPTION

The **PSB560V Series** pressure sense exit bar (36") offers the highest level of safety and reliability. The Sure Exit® proprietary tri-failsafe technology is activated by slight pressure, which immediately releases a magnetic lock or activates a delay.

FEATURES


- *Tri-failsafe for unequalled safety and reliability*
- *Human touch not required*
- *Sensor calibration not required*
- *Tolerates temperature changes 0° to 150°F*
- *Slim, low profile heavy duty design*
- *Two 5A, SPDT outputs*
- *10 ft cable and power transfer loop*



Field-installed sign
1"H green letters



SPECIFICATIONS	
Supply Voltage	12/24 VDC
Supply Current	20 mA at rest, 115 mA active
Activation Force	5 lbs (2.2 kg) Field Adjustable up to 15 lbs (6.8 kg) maximum
Output	Two SPDT Dry contacts, 3 amp @28 VDC
Operating Temperature	0° to 150°F (-18° to 65°C)
Dimensions	
PSB560V	36"W x 2.3"H x 1.875"D (91.4 x 6 x 4.7 cm)
PSB560V42	42"W x 2.3"H x 1.875"D (106.7 x 6 x 4.7 cm)
PSB560V48	48"W x 2.3"H x 1.875"D (121.9 x 6 x 4.7 cm)
Weight	
PSB560V	1.2 lb (0.5 kg)
PSB560V42	3.1 lb (1.4 kg)
PSB560V48	3.1 lb (1.4 kg)
Warranty	1 year

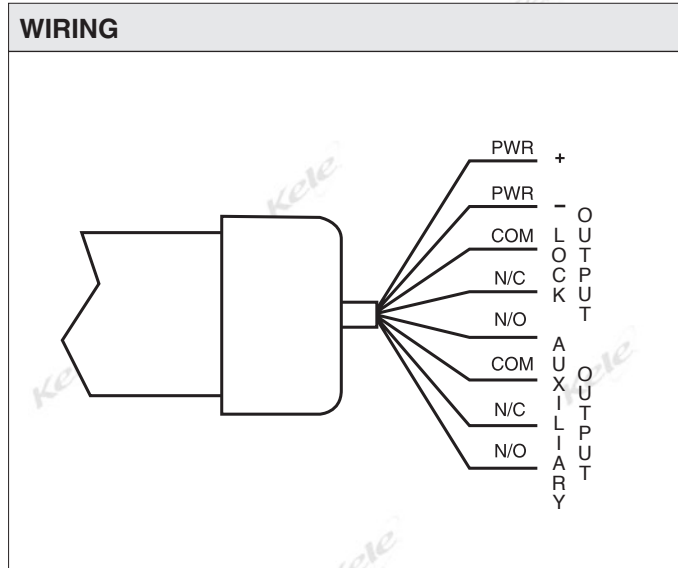

ORDERING INFORMATION

MODEL	DESCRIPTION
PSB560V	36" exit bar, aluminum anodized finish
PSB560V42	42" exit bar, aluminum anodized finish
PSB560V48	48" exit bar, aluminum anodized finish

* Aluminum anodized finish (V) is standard; also available special order are dark bronze anodized (X), black anodized (Y), bright stainless steel (S), and brushed stainless steel (U).