



PROPRIETARY NOTICE:  
THIS DOCUMENT AND THE DATA  
DISCLOSED HEREIN OR HEREWITH  
IS NOT TO BE REPRODUCED,  
USED OR DISCLOSED IN WHOLE  
OR IN PART WITHOUT THE  
PERMISSION OF INNOVATIVE  
SOLUTIONS.

REVISION BLOCK			
REV.	E.C.N. NO.	DESCRIPTION	DATE
00		INITIAL RELEASE	5/07/12
			MD

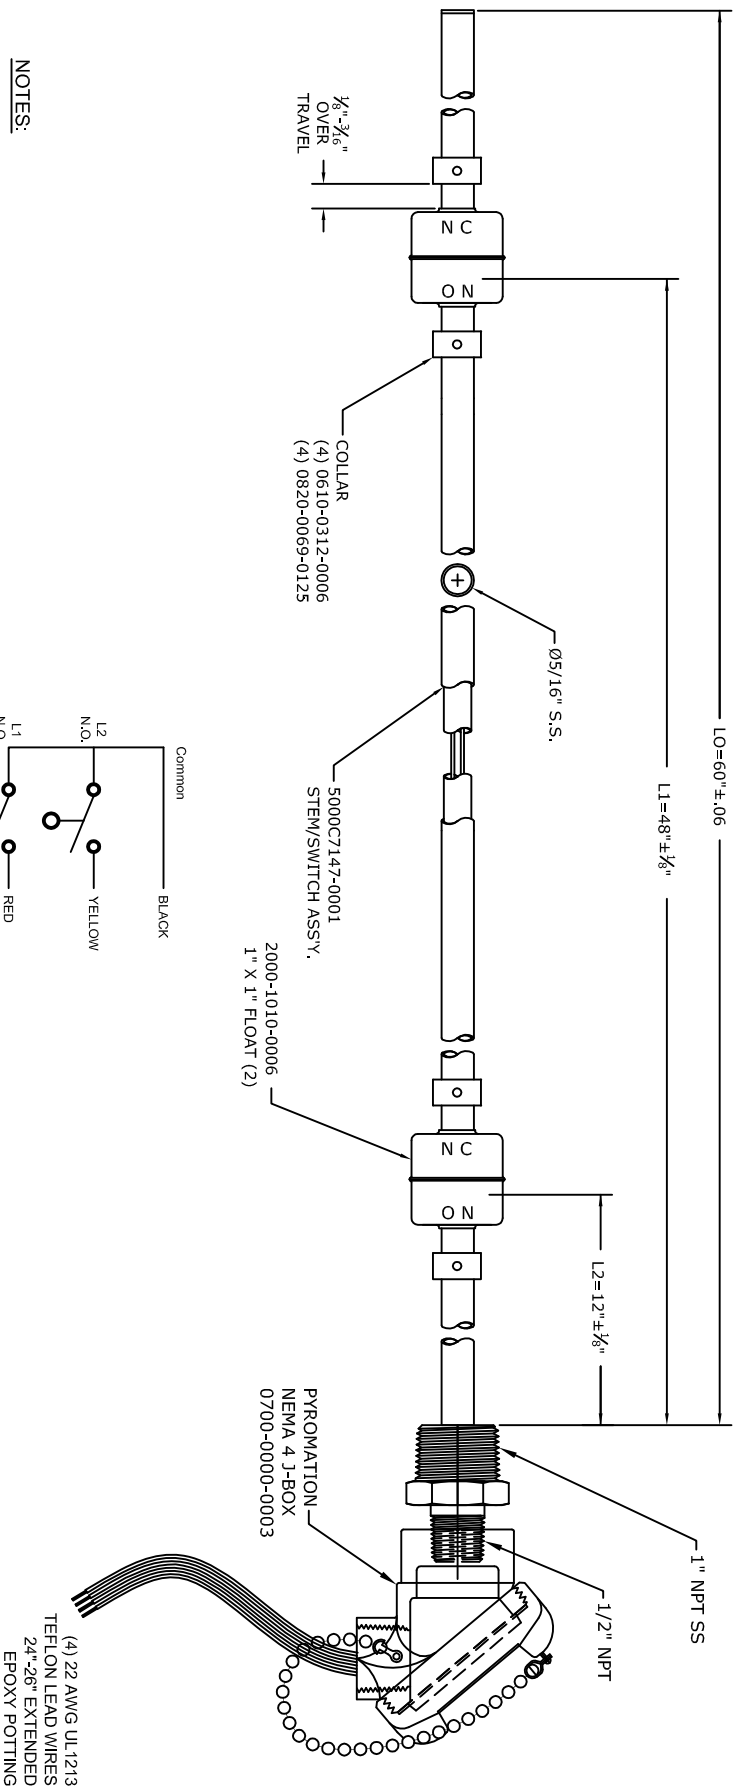

- NOTES:**
- 1.) WETTED MATERIALS:**  
A. STEM ASSEMBLY: 316 SS  
B. FLOAT: 316L SS  
C. COLLAR: 316 SS
- 2.) TEMPERATURE RANGE:** 300°F MAX.  
**3.) PRESSURE RATING:** 300 PSIG MAX.  
**4.) ELECTRICAL SPECIFICATIONS:**  
A. SWITCHING VOLTAGE: 240V AC/DC MAX.  
B. SWITCHING CURRENT: 0.5AMP MAX.  
C. CONTACT RATING: 50VA MAX.  
5.) MINIMUM MEDIA SP. GR.: 0.90  
6.) FLOAT SUBMERGENCE: 3/4" IN 1.0 S.G. WATER.



ITEM	QTY	PART NUMBER	DESCRIPTION, CATALOG NO. OR FINISHED SIZE	MATL.
UNLESS OTHERWISE SPECIFIED, MATERIAL PART #				
DIMENSIONS ARE IN INCHES. [ ] ARE IN MM (MILLIMETERS)				
TOLERANCES:				
X ± .1 XX ± .01 XXX ± .005				
FRACTIONS ± 1/64 ANGLES ± 30°				
MACHINED SURFACES: .007 RMS				
REMOVE ALL BURRS AND SHARP EDGES				
NEXT ASSY.				
MACH. AS SPECIFIED				
DATE: 4/30/12				
DRAWN BY: RAS				
CHECKED BY: MD				
DATE: 5/02/12				
TITLED: 2 LVL. ALL SS 50 VA				
DATE: 5/07/12				
PROJECT NO. MD				
FILING				
MACH. NO. L312C7147-0001				
SCALE				
SHEET 1 OF 1				

**RELEASED**  
By Casey V. at 3:09 pm, May 07, 2012