

DIN RAILS

RoHS compliant



Treated with galvanic zinc plating and passivation (gal Zn 8c according to Din 50960)

Minimum thickness 6 microns

Standard length: 2 meters (6'6¾")

Bottom mfg. holes

The most comprehensive range of *Din metal mounting rails*

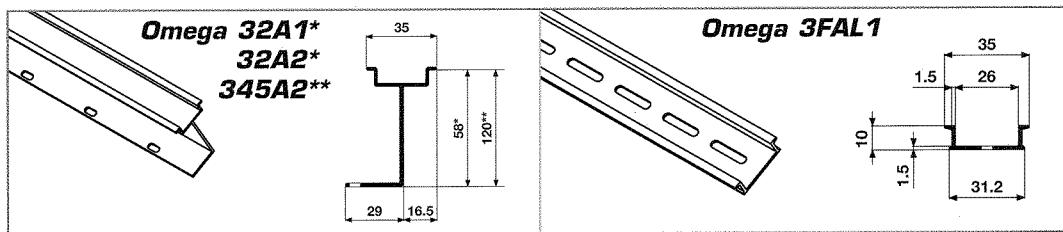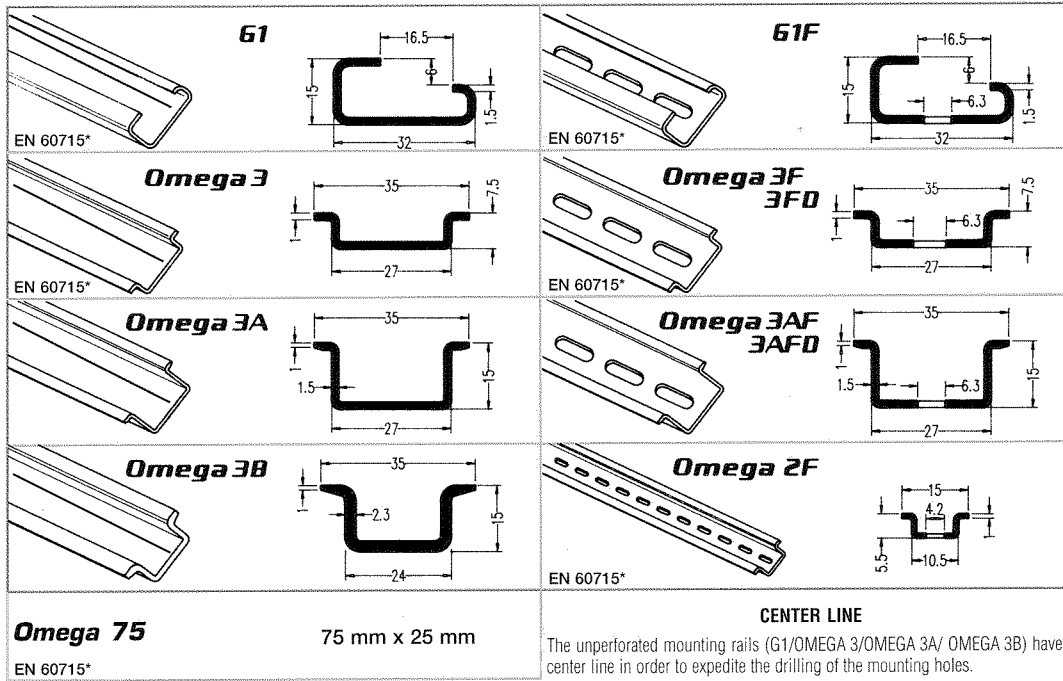

Catalog Number	Lengths per Pack
G1	12
G1F	12
G1F1	24
OMEGA 2F	20
OMEGA 2F1	40*
OMEGA 3	20
OMEGA 3F	20
OMEGA 3F1	40*
OMEGA 3FD	20
OMEGA 3A	10
OMEGA 3AF	10
OMEGA 3AF1	20*
OMEGA 3AFD	10
OMEGA 3B	10
OMEGA 3B1	10*
OMEGA 75	2

Catalog Number	Lengths per Pack
ALUMINUM	
OMEGA 32A1	6*
OMEGA 32A2	6
OMEGA 3FAL1	40*
OMEGA 345A2	2
GROMMET	
IG-11	10
COPPER	
OMEGA 3ACU	1
STAINLESS STEEL	
OMEGA 3SS	4
OMEGA 3SS1	8*

*One meter long

