

Heavy duty switch terminal blocks with blade

Screw clamp, DIN 1-3



M 4/6.SNB - 4 mm² blocks - 6 mm .238" spacing

Characteristics


		IEC NFC DIN	UL	CSA
Wire size mm ² / AWG	Solid	0.5 - 4	22-10 AWG	20-12 AWG
	Stranded	0.5 - 2.5		
Voltage	V	400	300	300
Current	A	20	10	10
Rated wire size	mm ² / AWG	4 mm ²	10 AWG	12 AWG
Wire stripping length	mm / inches	9.5 mm / .37"		
Recommended torque	Nm / lb.in	0.5-0.6 Nm / 4.4-5.3 lb.in		

Selection


Description	Type	Order P/N	Packaging
Standard block grey / orange	M 4/6.SNB	0115 986.00	50
Standard block grey / orange + Test Ø 2mm	M 4/6.SNBT	0115 987.01	50

Accessories

End stop	BAM2 9.9 mm	0206 351.16	50
End section grey	FEM62 3 mm	0114 994.07	20
Shield connector	CBM5 0.5 mm	0178 745.14	50
	CBM8 0.8 mm	0178 746.15	50



M 4/6.SNB



BAM2



FEM62



CBM...

M 4,6 SNBT... - 4 mm² blocks - 6 mm .238" spacing

Characteristics


		IEC NFC DIN	UL	CSA
Wire size mm ² / AWG	Solid	0.5 - 4	22-10 AWG	—
	Stranded	0.5 - 4		
Voltage	V	320	300	—
Current	A	20	10	—
Rated wire size	mm ² / AWG	4 mm ² A4	10 AWG	—
Wire stripping length	mm / inches	9.5 mm / .374"		
Recommended torque	Nm / lb.in	0.5-0.6 Nm / 4.4-5.3 lb.in		

Selection


Description	Type	Order P/N	Packaging
Grey / Orange	M 4/6.SNBT.23	0206 538.02	50

Accessories

End stop	BAM2 9.9 mm	0206 351.16	50
End section grey	FEM62 3 mm	0114 994.07	20
Shield connector	CBM5 0.5 mm	0178 745.14	50
	CBM8 0.8 mm	0178 746.15	50



M 4/6.SNBT...



BAM2



FEM62



CBM...

Heavy duty switch terminal blocks

Screw clamp, DIN 1-3

M 6/8.SNB - 6 mm² blocks - 8 mm .315" spacing - blade switching

Characteristics


		IEC NFC	DIN	UL	CSA
Wire size mm ² / AWG	Solid	0.5 - 10		22-8 AWG	20-12 AWG
	Stranded	0.5 - 6			
Voltage	V	400		300	300
Current	A	15		20	10
Rated wire size	mm ² / AWG	6 mm ²		10 AWG	12 AWG
Wire stripping length	mm / inches	12 mm / .47"			
Recommended torque	Nm / lb.in	0.8-1 Nm / 7.1-8.9 lb.in			

Selection


Description	Type	Order P/N	Packaging
Standard block grey	<input type="checkbox"/> M 6/8.SNB	0115 688.25	50

Accessories

End stop		BAM2 9.9 mm	0206 351.16	50
End section	grey	<input type="checkbox"/> FEM8 3 mm	0113 373.26	20
	orange	<input type="checkbox"/> FEM8 3 mm	0103 230.02	20
Separator end section	grey	<input type="checkbox"/> SCFM6 3 mm	0114 825.05	20



M 6/8.SNB



M 6/8.STP - 6 mm² blocks - 8 mm .315" spacing - push-turn knob switching

Characteristics


		IEC NFC	DIN	UL	CSA
Wire size mm ² / AWG	Solid	0.5 - 10		22-8 AWG	8 AWG
	Stranded	0.5 - 6			
Voltage	V	500		600	600
Current	A	15		40	15
Rated wire size	mm ² / AWG	6 mm ²		8 AWG	8 AWG
Wire stripping length	mm / inches	11 mm / .433"			
Recommended torque	Nm / lb.in	0.8-1 Nm / 7.1-8.9 lb.in			

Selection


Description	Type	Order P/N	Packaging
Standard block grey	<input type="checkbox"/> M 6/8.STP	0115 277.20	25
Bloc with Ø4mm test socket	<input type="checkbox"/> M 6/8.STP 1	0115 529.15	25

Accessories

End section		BAM2 9.9 mm	0206 351.16	50
Separator end section	grey	<input type="checkbox"/> FEMT1 2.8 mm	0113 137.02	50



M 6/8.STP



Heavy duty switch and fuse holder terminal blocks

Double-deck

Screw clamp, DIN 1 - DIN 3

Screw clamp

M 4/6.D2.SNBT - 4 mm² blocks - 6 mm .238" spacing - blade switch

Characteristics

		IEC NFC DIN	UL	CSA
Wire size mm ² / AWG	Solid	0.5 - 4	24-12 AWG	22-12 AWG
	Stranded	0.5 - 4		
Voltage	V	400	300	300
Current	A	10	15	15
Rated wire size	mm ² / AWG	4 mm ²	12 AWG	12 AWG
Wire stripping length	mm / inches	9.5 mm / .374"		
Recommended torque	Nm / lb.in	0.5-0.6 Nm / 4.4-5.3 lb.in		

Selection

Description	Type	Order P/N	Packaging
Standard block grey	<input type="checkbox"/> M 4/6.D2.SNBT	0115 561.15	50

Accessories

End stop		BADH 12 mm	0116 900.27	50
		BAMH 9.1 mm	0114 836.00	50
End section	Grey <input type="checkbox"/>	FEMS6D 1.5 mm	0116 591.05	20
Assembled jumper bar (with IP20 protection)	2 poles	BJMI6D 32 A ①	0179 668.20	10
	3 poles	BJMI6D 32 A ①	0179 669.21	10
	4 poles	BJMI6D 32 A ①	0179 670.26	10
	5 poles	BJMI6D 32 A ①	0179 671.13	10
	10 poles	BJMI6D 32 A ①	0179 672.14	10
Shield connector		CBD2S	0178 408.14	50

M 4/8.D2.SF - for fuses 5x20 mm .197x.787 in. and 5x25 mm .197x.984 in. - 4 mm² blocks - 8 mm .315" spacing

Characteristics

		IEC NFC DIN	UL	CSA
Wire size mm ² / AWG	Solid	0.5 - 6	24-12 AWG	24-12 AWG
	Stranded	0.5 - 4		
Voltage	V	630 ②	300 ②	300 ②
Current	A	6.3	20	20
Rated wire size	mm ² / AWG	4 mm ²	12 AWG	12 AWG
Wire stripping length	mm / inches	9.5 mm / .37"		
Recommended torque	Nm / lb.in	0.5-0.8 Nm / 4.4-7.1 lb.in		

Selection


Description	Type	Order P/N	Packaging
Standard block grey	<input type="checkbox"/> M 4/8.D2.SF	0115 604.21	50
Standard block beige V0	<input type="checkbox"/> M 4/8.D2.SF.V0	0195 604.22	50

Accessories

End stop		BADH 12 mm	0116 900.27	50
		BAMH 9.1 mm	0114 836.00	50
End section	grey <input type="checkbox"/>	FEM8D2S 1.5 mm	0116 913.07	20
Assembled jumper bar (with IP20 protection)	2 poles	BJM8D 41 A ①	0168 520.05	10
	3 poles	BJM8D 41 A ①	0168 521.22	10
	4 poles	BJM8D 41 A ①	0168 522.23	10
	5 poles	BJM8D 41 A ①	0168 528.24	10
	10 poles	BJM8D 41 A ①	0168 974.00	10
Shield connector		CBD2S	0178 408.14	50


① Lower deck only.

② Insulation voltage of terminal block - operating voltage : according to fuse.

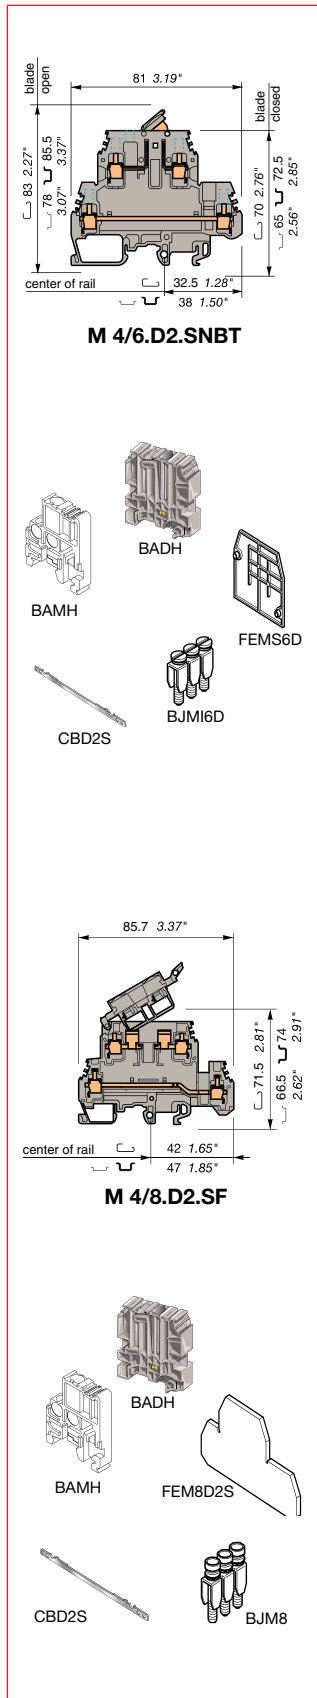

Fuse holder terminal blocks

5x20 mm .197x.787 in. and 5x25 mm .197x.984 in.
Screw clamp, C U DIN 1 - DIN3



M 4/8.SF


M 4/8.SF- 4 mm² blocks - 8 mm .315" spacing

Characteristics

		IEC NFC	DIN	UL	CSA
Wire size mm ² / AWG	Solid	0.5 - 6		22-12 AWG	22-12 AWG
	Stranded	0.5 - 4			
Voltage	V	630 ①②		600 ①	250
Current	A	6.3		10	10
Rated wire size	mm ² / AWG	4 mm ²		12 AWG	12 AWG
Wire stripping length	mm / inches	9.5 mm / .37"			
Recommended torque	Nm / lb.in	0.5-0.8 Nm / 4.4-7.1 lb.in			

Selection

Description	Type	Order P/N	Packaging	
Standard block	grey <input type="checkbox"/>	M 4/8.SF	0115 657.25	50
Block with test socket Ø2 mm	grey <input type="checkbox"/>	M 4/8.SF	0115 662.22	50
Standard block	orange <input type="checkbox"/>	M 4/8.SF2	0105 135.11	50
Standard block	beige V0 <input type="checkbox"/>	M 4/8.SF.V0	0195 657.26	50



M 4/8.SFL


M 4/8.SFL - 4 mm² blocks - 8 mm .315" spacing

Characteristics

		IEC NFC	DIN	UL	CSA
Wire size mm ² / AWG	Solid	0.5 - 6		22-12 AWG	22-12 AWG
	Stranded	0.5 - 4			
Voltage	V	400		600	250
Current	A	6.3		10	10
Rated wire size	mm ² / AWG	4 mm ²		12 AWG	12 AWG
Wire stripping length	mm / inches	9.5 mm / .374"			
Recommended torque	Nm / lb.in	0.5-0.8 Nm / 4.4-7.7 lb.in			

Selection

Description	Type	Order P/N	Packaging	
Block with fusion indicator neon	grey <input type="checkbox"/>	M 4/8.SFL	0115 661.21	50
Block with fusion indicator 24V	grey <input type="checkbox"/>	M 4/8.SFD	0115 663.23	50



M 4/8.SN

M 4/8.SN - 4 mm² blocks - 8 mm .315" spacing

Characteristics

		IEC NFC	DIN	UL	CSA
Wire size mm ² / AWG	Solid	0.5 - 6		22-12 AWG	24-12 AWG
	Stranded	0.5 - 4			
Voltage	V	630 ①		600	250
Current	A	6.3		10	10
Rated wire size	mm ² / AWG	4 mm ²		12 AWG	12 AWG
Wire stripping length	mm / inches	9.5 mm / .37"			
Recommended torque	Nm / lb.in	0.5-0.8 Nm / 4.4-7.1 lb.in			

Selection

Description	Type	Order P/N	Packaging	
Standard block grey body/blue grip	<input type="checkbox"/>	M 4/8.SN	0115 659.07	50
Standard block beige body/blue V0 grip	<input type="checkbox"/>	M 4/8.SN.V0	0195 659.00	50

Accessories

End stop		BAM2 9.9 mm	0206 351.16	50
End section	grey <input type="checkbox"/>	FEM8S 1.5 mm	0116 951.15	20
	orange <input type="checkbox"/>	FEM8S 1.5 mm	0103 923.15	20

① Insulation voltage of terminal block - operating voltage : according to fuse.
② 400 V for block M 4/6.SFT

