



Datasheet

SOLID CORE CURRENT TRANSDUCER

CX Series (Current)



Precision Power control/sensing

FEATURES:

- Solid Core
- 4-20 mA Output
- Selectable or Fixed Range Models
- Up to 200 amps Input Current

MANUFACTURED BY AN ISO 9001 REGISTERED QUALITY SYSTEM KELE INC. PARTNER

AC CURRENT TRANSDUCERS

CX Series (Current)

DESCRIPTION:


The CX Series (Current) current transducers monitor line current for electrical loads such as pumps, conveyors, machine tools, or fans and output a 4-20 mA signal to represent the load current.

The CX Series (Current) is loop-powered and requires 15 to 30 VDC to power the device.

The transducers are typically used to monitor motor operation and can be used to determine motor failure, belt loss, machine feed rates or tool wear.


SPECIFICATION:

Measurement Range:.....	Up to 200 Amps - See ordering information
Accuracy:.....	± 2% FSO (5-100% of range)
Signal Output:.....	4-20 mA
Sensor Power:.....	15-30 VDC
Insulation Class:.....	600 VAC, insulated conductors
Frequency:.....	40-100 Hz
Response Time:.....	250 mS Typical, 0-90%
Output Load:.....	250Ω typical
Operating Temperature:.....	5° to 140°F (-15° to 60°C)
Operating Humidity:.....	5 to 90% RH non-condensing
Terminal Block:.....	14 to 22 AWG
Dimensions:.....	2.65 x 2.7 x 0.95 in (67 x 68.6 x 24.1 mm)
Sensor Aperture:.....	0.8 in (20.3 mm)
Enclosure Material:.....	ABS/PC, UL94 V-0
Agency Approvals:.....	cULus Listed

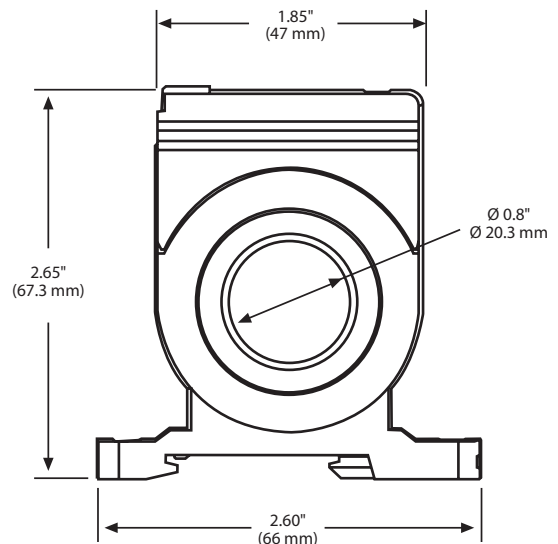

FEATURES:

- No field adjustment necessary, factory calibrated
- Input / Output isolation via current transformer
- Solid-state reliability
- Small compact size
- Solid, reliable mounting method

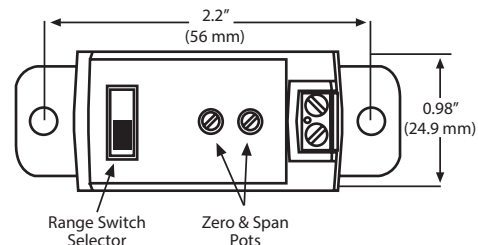

NOTE: The range switch/jumper is not applicable for models with 1 fixed range.

PRODUCT ORDERING INFORMATION

MODEL	SENSING RANGE	MAXIMUM INPUT CURRENT	SIGNAL OUTPUT
CX42050	0-20/40/50 Amps- Switch Selectable	100 Amps Continuous	4-20 mA
CX420150	0-50/100/150 Amps - Switch Selectable	150 Amps Continuous	4-20 mA
CX420200	0-200 Amps	250 Amps Continuous	4-20 mA



Kele Inc.
3300 Brother Boulevard
Bartlett, TN 38133
info@kele.com
kele.com



RoHS
COMPLIANT



USA: 888-397-5353
FAX: 800-284-5353
International: 901-382-6084
International FAX: 901-388-1697