


## PSC40AB10

Enclosed Single **40 VA** Power Supply, 120 to 24 Vac

## PSC100AB10

Enclosed Single **100 VA** Power Supply, 120 to 24 Vac

## AC Power Supply

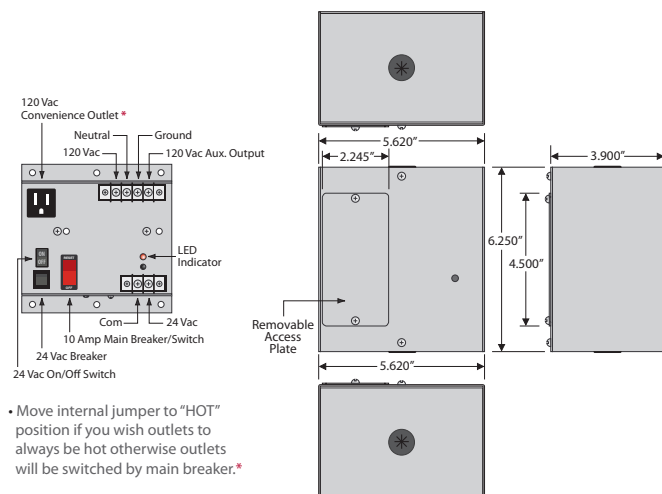

• Move internal jumper to "HOT" position if you wish outlets to always be hot otherwise outlets will be switched by main breaker.\*

## Specifications

**Transformer:** One 40 VA Split-Bobbin, Inherently Limited (PSC40AB10)  
One 100 VA Split-Bobbin, Circuit Breaker (PSC100AB10)

**Primary:** 120 Vac

**Secondary:** 24 Vac, w/ LED Indicator

**Frequency:** 50/60 Hz

**24 Vac ON/OFF:** On / Off Switch & Breaker

**Main Breaker ON/OFF:** Switch / Breaker (10 Amp)  
(Kills power to entire unit: Outlets, Aux. Output, & Transformer)\*\*

**Total Combined Output** 9A

**Mounting:** Mounting plate included (as shown)

**Approvals:** Class 2 (UL Approved UL5085-3), UL916, UL508, C-UL, CE, RoHS

**Dimensions:** 6.250" x 5.620" x 4.250"

**Weight:** 4.40 lbs. (PSC40AB10)  
5.80 lbs. (PSC100AB10)



Shown Without Cover



Shown With Cover



### Notes:

- To order without enclosure, see PSB40AB10 & PSB100AB10.
- To order UL508, add "-IC" to end of model number.