Advantages of a Finger-Safe, Ice Cube Socket System

The Complete System Solution!



- Offers a "one stop solution" for your power management system.
- Variety of contact configurations and materials to meet your switching needs.
- Plug-In switching capabilities from 10mA to 20 Amps.
- A variety of Feature Codes and operation combinations available for all budgets.
- Ejector clips, ribbed relay housings and space-saving sockets allow for easy removal from crowded DIN rails.
- Color and appearance designed for high visibility in all environments.
- Wiring diagrams include NEMA and IEC standards.
- Engineering availability allows for customized relay solutions.
- Internal Coil Bus Jumper
 System reduces the number of wires required for hook-up to adjacent sockets.



I.D. Tag/Write-On Plastic LabelUsed for Custom Identification of Circuits.

Isolated Input and Output Terminals

Separates Control Circuits from Load Circuits.

Slim Design

Minimizes Space on DIN Rail. —

Mating Hold-Down Clips Available

Secures Relay to Socket.





DIN Rail End Clip


Locking Screw Keeps a Snug DIN Rail System by Eliminating Sliding Sockets.

DIN Rail


35 mm Extruded Aluminum Rail. Designed to Work With Most Sockets. Pre-punched for Quick Installation.





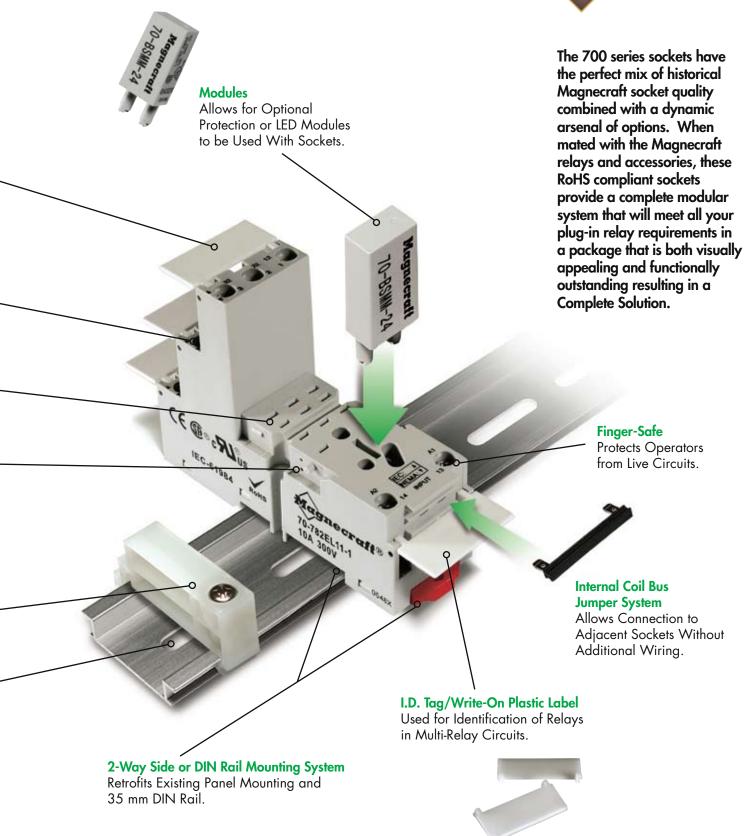



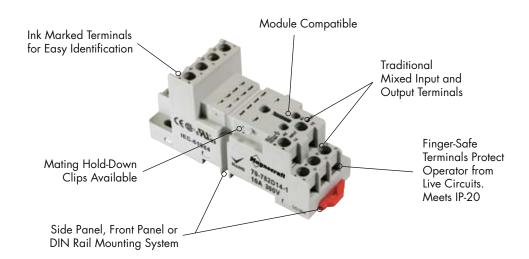









BOLD-FACED PART NUMBERS ARE NORMALLY STOCKED

Standard Part Number

Description

70-782D14-1

14-Pin Ice Cube, DIN/Panel Mount with Screw Terminals & Clamping Plates.

General Specifications (UL 508)

Characteristics	Units	Value	
Number of Terminals		14	
ri . ' in .'			
Electrical Rating	AZ b	200	
Nominal Voltage Rating	Volts	300	
Nominal Current Rating	Amps	10	
Dielectric Strength			
Output to Adjacent Output Terminals	V rms	3000	
Output to Input Terminals	V rms	3000	
Terminals to Rail / Chassis	V rms	3000	
Temperature			
Operating Range:	°C	- 40 to + 80	
Storage Range:	°C	- 40 to + 105	
Construction			
Protection Category (Finger-Safe)	EN 60529	IP 20	
Internal Metal Tracks	LIN 00327	Copper Alloy, Zinc Plated	
Screw Terminals		Steel, Zinc Plated	
		Combination Head.	
Screw Style			
Screw size	mm	M3.5	
Screw Torque 3.5 mm (Maximum)	Lb-in / Nm	9 /1.0	
Miscellaneous			
Socket Mounting:		Din / Panel	
Wire Size Capacity (Maximum)	EN 60204-1	AWG mm2	
Soild Cu	AWG, mm2	16 / 18 (2) 1.5 / 0.75 (2)	
Stranded Cu	AWG, mm2	16 / 18 (2) 1.5 / 0.75 (2)	
Wire Connection Method		Screw Clamping	
DIN Rail Mounting	EN 60715	35mm	
Chassis Mount Screw Torque	Lb-in / Nm	7 / 0.8	
Flamability Rating	Class	94V-0	
Body Color		Light Gray	
DIN Locking Method		Red Plastic Locking Clip	
Product Certification		UL, CSA	
Conformance		CE, RoHS	
Weight	grams	62	

Optional Mating Accessories



Standard Part Number	Description	Catalog Location
782XDX1, 2, 3 & 782H	Relay	Section 1 p.18-19, 42-43
16-782PC-1	Plastic Hold-Down Ejector Clip for 782	Section 3 p.8-11
16-700ST-1	Plastic Snap-On I.D. Tag	Section 3 p.12
16-782SC	Metal Hold-Down Clip for 782	Section 3 p.8-11
16-1342	Metal Hold-Down Clip used with 782H	Section 3 p.8-11
TDR782XDX	Relay	Section 5 p.14-17
16-TDR782SC	Metal Hold-Down Clip for TDR782	Section 3 p.8-11
70-BSM	Module	Section 3 p.6-7
16-700DIN	Metal DIN Rail	Section 3 p.19
16-DCLIP-1	DIN Rail Locking Clip	Section 3 p.19

