

Duct Averaging Temperature Sensor

Active sensor (4 to 20 mA) for measuring the averaging temperature in duct applications. NEMA 4X / IP65 rated enclosure. Supplied with one continuous sensing element across the whole length of the probe to ensure optimum accuracy and eliminate air stratification problems.



Type Overview

Type	Output Signal Active Temperature	Probe Length
22MT-544	4...20 mA	10 ft [3 m]
22MT-545	4...20 mA	20 ft [6 m]

Technical Data

Electrical Data	Power Supply DC	15...24 V, ±10%, 0.5 W
	Electrical Connection	removable spring loaded terminal block max. 11 GA [2.5 mm ²]
	Cable Entry	cable gland PG11 Ø6 to 10 mm, with strain relief Ø6 to 8 mm, 1/2" conduit adapter included
Functional Data	Multirange	8 fields selectable
	Output Signal Active Note	current outout: max. 500 Ω load
	Media	air
Measuring Data	Measured Values	temperature
	Measuring Range Temperature Settings	Activ sensor: range selectable Attention: max. measuring temperature is restricted by max. medium temperature (see Safety data) Setting range [°C] range [°F] Factory setting
		S0 -50°C to 50°C -30°F to 130°F S1 -10°C to 120°C 0°F to 250°F S2 0°C to 50°C 40°F to 140°F S3 0°C to 250°C 30°F to 480°F S4 -15°C to 35°C 0°F to 100°F S5 0°C to 100°C 40°F to 240°F S6 -20°C to 80°C 40°F to 90°F S7 0°C to 160°C 0°F to 150°F
	Accuracy Temperature	±1% of measuring range @ 70°F [21°C]
Materials	Cable Gland	PA6, black
	Housing	cover: lexan, Belimo orange NCS S0580-Y6OR base: lexan, Belimo orange NCS S0580-Y6OR seal: 0467 NBR70, black

Safety Data	Ambient Humidity	85% RH non-condensing
	Ambient Temperature	-30°F to 120°F [-35°C to 50°C]
	Medium Temperature	-60°F to 175°F [-50°C to 80°C]
	Housing Surface Temperature (Tsurf)	max. 160°F [70°C]
	Protection Class IEC/EN	III safety extra-low voltage (selv)
	Protection Class UL	UL Class 2 Supply
	EU Conformity	CE Marking
	Certification IEC/EN	IEC/EN 60730-1 and IEC/EN 60730-2-9
	Certification UL	pending
	Degree of Protection IEC/EN	IP65
	Degree of Protection NEMA/ UL	NEMA 4X
	Quality Standard	ISO 9001
	Weight	0.25 lbs

Safety Notes


The installation and assembly of electrical equipment should only be performed by authorized personnel.

The product should only be used for the intended application. Unauthorized modifications are prohibited! The product must not be used in relation with any equipment that in case of a failure may threaten, directly or indirectly, human health or life or result in danger to human beings, animals or assets. Ensure all power is disconnected before installing. Do not connect to live/operating equipment.


Please comply with

- Local laws, health & safety regulations, technical standards and regulations
- Condition of the device at the time of installation, to ensure safe installation
- This data sheet and installation manual

Accessories

Scope of Delivery	installation kit cable gland nut conduit 1/2" NPT mounting brackets
--------------------------	---

Wiring Diagram

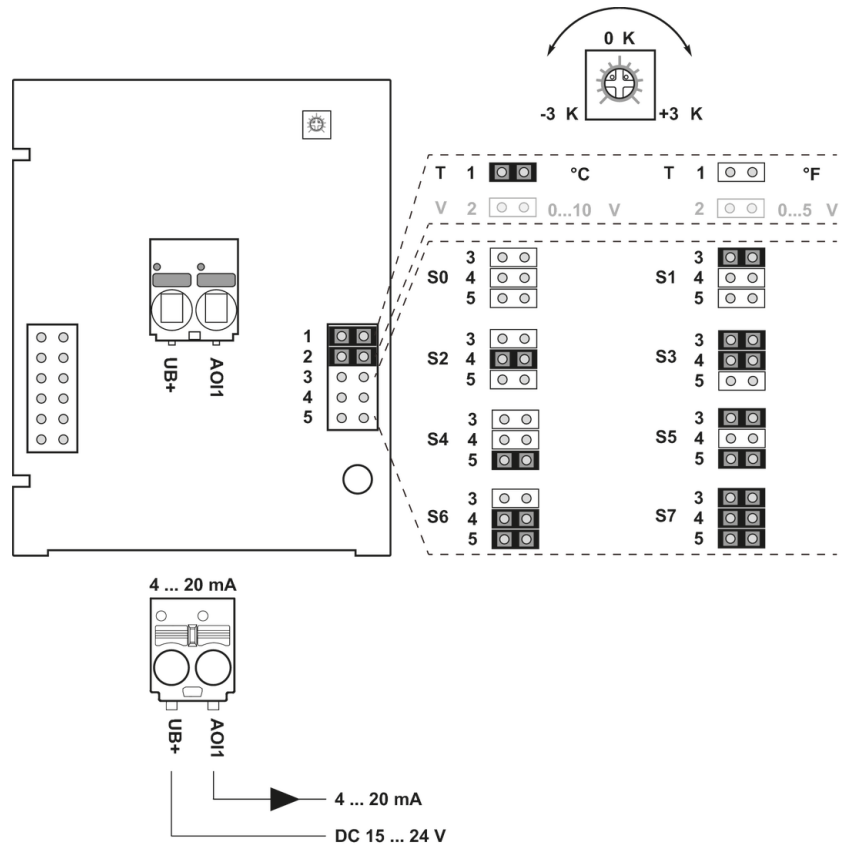

the adjustment of the measuring ranges is made by changing the bonding jumpers
the output value in the new measuring range is available after 2 seconds

Setting	range [°C]	range [°F]	Factory setting
S0	-50°C to 50°C	-30°F to 130°F	
S1	-10°C to 120°C	0°F to 250°F	
S2	0°C to 50°C	40°F to 140°F	
S3	0°C to 250°C	30°F to 480°F	
S4	-15°C to 35°C	0°F to 100°F	
S5	0°C to 100°C	40°F to 240°F	
S6	-20°C to 80°C	40°F to 90°F	✓
S7	0°C to 160°C	0°F to 150°F	

