


FieldServer Data Sheet - BACnet Explorer NG FS-BENG-X

Rev. 1.A

Overview

Sierra Monitor's BACnet Explorer
Next Generation (NG) offers all you
would expect from a high-end
Explorer product and more. Not only
will the BACnet Explorer NG
automatically discover BACnet/IP
and BACnet MS/TP networks but
with new Monitor View and Historian
features, device data points can be
precisely tracked and logged for
analysis.

Additionally, the Explorer acts as a Wi-Fi access point for modern

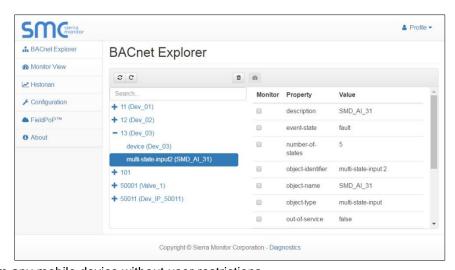

configuration and remote access from any mobile device without user restrictions.

The BACnet Explorer NG has a user-friendly configuration page to streamline the setup process. With the push of a button, the user can discover all the BACnet devices connected to the Explorer.

The BACnet Explorer NG also supports BBMD as a standard feature, allowing it to view all configured BBMD networks for testing and debugging.

BACnet Explorer NG Features and Benefits

Multiple Connections

Ethernet
 Serial
 Wi-Fi
 Cellular

Ease of Use


- Discover BACnet/IP and BACnet MS/TP networks simultaneously
- Explore BACnet MS/TP devices without a dongle requirement
- Write to BACnet objects
- Discover all BBMD BACnet networks when configured
- Explore specific device IDs and networks for additional device properties
- Allows simultaneous multi-user access
- Wi-Fi access point allows for connection from any mobile device
- Configure easily on the web using smartphone or other smart devices without additional software installations
- Monitor View and Historian features enable continuous network and device monitoring with data trending
- **FieldPoP**[™] registration connects your devices to the cloud, allowing secure remote access for diagnostics, monitoring, alarming and configuration
- Secure data transfer through REST APIs

Ease of Installation

- Equipped with an MDIX port so any Ethernet cable can be used for commissioning and installation
- Utilizes DHCP to automatically obtain IP settings from the network
- Industrial design: 12 to 24V DC and DIN rail



The BACnet Explorer NG offers access anywhere through its own Wi-Fi access point. Meaning connection to your devices is available directly from the Explorer or through the cloud with FieldPoP.

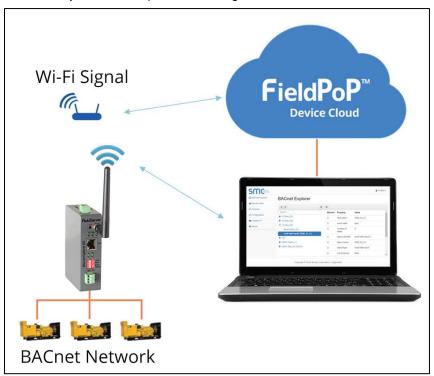

Hardware Specifications *

Communication

Serial (Galvanic Isolation): RS-485/RS-232 **Baud:** 9600, 19200, 34800, 57600, 76800, 115000

Ethernet 10/100BaseT MDIX DHCP

Environment

Operating Temperature: -20 to 70°C (-4 to 158°F) Relative Humidity: 10-95% RH non-condensing

Other

Web Configuration Toolbox diagnostic utility Table, Wall mount DIN rail mount included

Construction

Dimensions (HxWxD)

4 x 1.1 x 2.7 in (10.16 x 2.8 x 6.8cm)

Weight: 0.4 lbs (0.2 Kg) **Power Requirements**

12-24V DC

Current draw @ 12V: 240 mA

Approvals

CE and FCC Class B & C Part 15
TUV Approved to UL 60950 pending
IC Canada
RoHS Compliant
PTCRB and CTIA









* Specifications subject to change without notice

Radio Specifications

Wi-Fi 802.11 b/g/n

Frequency: 2.4 GHz Channels: 1 to 11 (inclusive) Antenna Type: SMA Encryption: TKIP, WPA & AES

Cellula

Features: 3G & GPS Antenna Type: SMA HSDPA: Up to 21.0 Mbps HSUPA: Up to 5.76 Mbps

Ordering Information

- FS-BENG-W (Wi-Fi): includes PSU and termination screwdriver
- FS-BENG-C (cellular): includes PSU and termination screwdriver