

MODULAR MAGNETIC LOCK 1570 SERIES


DESCRIPTION

The 1570 Series is an ANSI grade 1 modular magnetic lock, with 1200 lb holding force. They are field upgradeable and can be serviced without removing from the door frame. When power is removed the holding force is released.

FEATURES

- · 1200 lb holding force
- Autosensing 12/24 VDC voltage input
- Choice of 9 anodized & plated finishes
- ANSI/BHMA grade 1 compliant
- BHMA certified holding force
- Quick mount assembly



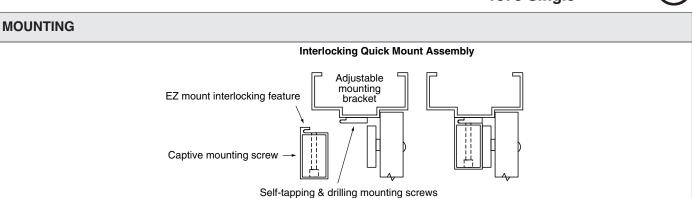

SPECIFICATIONS

Power 12/24 VDC

Single

125 mA @ 24 VDC; 250 mA @ 12 VDC Current

Dimensions 2.75"H x 11"L x 1.562"D

(6.99 x 27.94 x 3.97 cm)

Weight 11 lb (5.0 kg)

Double

Current 250 mA @ 24 VDC; 500 mA @ 12 VDC

Dimensions 2.75"H x 22"L x 1.562"D


(6.99 x 55.88 x 3.97 cm)

Weight 27 lb (12.2 kg)

Approvals UL, CSFM (3774-0324:100),

MEA Listed (61-95-E)

Warranty 1 year

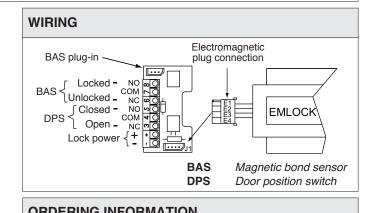

ONDERING INI ONMATION					
	15	Series number			
	,	71	Magnetic lock, surface mount, single, 1200 lb		
		72	Magnetic lock, surface mount, double, 1200 lb		
		73	Magnetic lock, surface mount, single, 1200 lb w/split armature for pair of doors		
			٧	628 Aluminum (standard)	
			Х	Dark bronze powder coat	
			Υ	335 Black anodized	

UPGRADE MODULES

EZ-T-10 EZ-D-10*

Adjustable timer input module Door position sensor module (Order 2 for 1572) Magnetic bond sensor module (Order 2 for 2572)

not available with 1573

89