



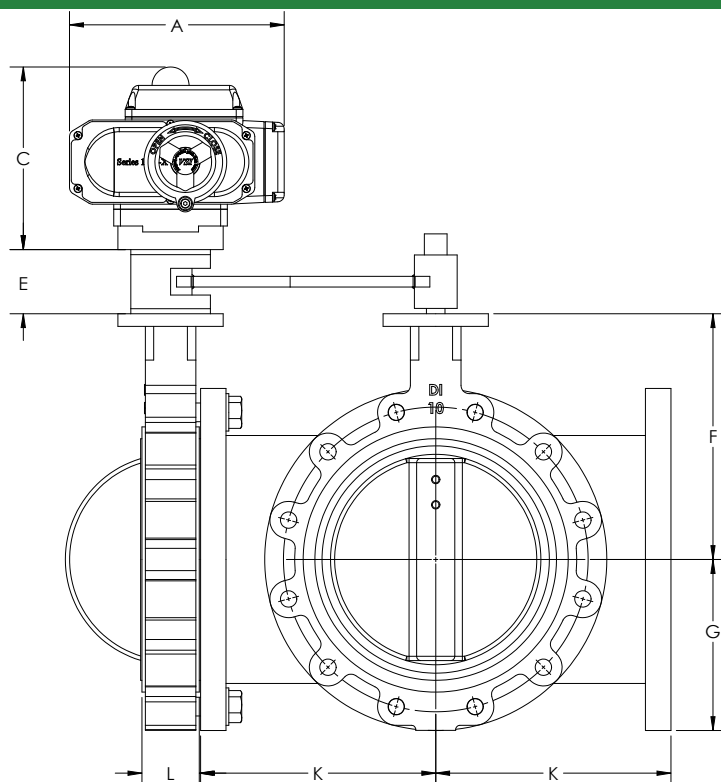

SERIES 2110 - SERIES 1000-X

2 POSITION INDUSTRIAL ELECTRIC ACTUATORS
3-WAY 2" - 24" RESILIENT SEATED BUTTERFLY VALVES

DIMENSIONAL INFORMATION

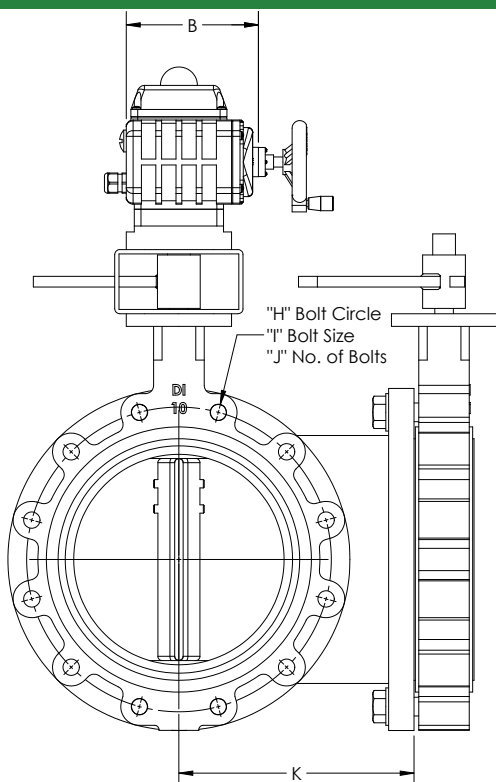

DIMENSIONS: MM (INCHES)

PSI	VALVE SIZE		ACTUATOR	A	B	C	E	F	G	H	J x I	K	L
	INCH	DN											
100 PSI	2	50	1005-X	160 (6.30)	112 (4.41)	160.5 (6.32)	50.8 (2.00)	161 (6.34)	80 (3.15)	4.75	4 x 5/8 - 11	114.3 (4.50)	43 (1.69)
	2.5	65	1005-X	160 (6.30)	112 (4.41)	160.5 (6.32)	50.8 (2.00)	175 (6.89)	89 (3.50)	5.5	4 x 5/8 - 11	127 (5.00)	46 (1.81)
	3	75	1005-X	160 (6.30)	112 (4.41)	160.5 (6.32)	50.8 (2.00)	181 (7.13)	95 (3.74)	6	4 x 5/8 - 11	139.7 (5.50)	46 (1.81)
	4	100	1010-X	196 (7.72)	121 (4.76)	181 (7.13)	50.8 (2.00)	200 (7.87)	114 (4.49)	7.5	8 x 5/8 - 11	165.1 (6.50)	52 (2.05)
	5	125	1010-X	196 (7.72)	121 (4.76)	181 (7.13)	50.8 (2.00)	213 (8.39)	127 (5.00)	8.5	8 x 3/4 - 10	190.5 (7.50)	56 (2.20)
	6	150	1010-X	196 (7.72)	121 (4.76)	181 (7.13)	50.8 (2.00)	226 (8.90)	139 (5.47)	9.5	8 x 3/4 - 10	203.2 (8.00)	56 (2.20)
	8	200	1020-X	255 (10.04)	158 (6.22)	218 (8.58)	50.8 (2.00)	260 (10.24)	175 (6.89)	11.75	8 x 3/4 - 10	228.6 (9.00)	60 (2.36)
	10	250	1020-X	255 (10.04)	158 (6.22)	218 (8.58)	50.8 (2.00)	292 (11.50)	203 (7.99)	14.25	12 x 7/8 - 9	279.4 (11.00)	68 (2.68)
	12	300	1040-X	255 (10.04)	158 (6.22)	218 (8.58)	50.8 (2.00)	337 (13.27)	242 (9.53)	17	12 x 7/8 - 9	304.8 (12.00)	78 (3.07)
	14	350	1060-X	255 (10.04)	158 (6.22)	218 (8.58)	50.8 (2.00)	368 (14.49)	267 (10.51)	18.75	12 x 1 - 8	355.6 (14.00)	78 (3.07)
	16	400	1100-X	310 (12.20)	217 (8.54)	244 (9.61)	76.2 (3.00)	400 (15.75)	297 (11.69)	21.25	16 x 1 - 8	381 (15.00)	102 (4.02)
	18	450	1100-X	310 (12.20)	217 (8.54)	244 (9.61)	76.2 (3.00)	422 (16.61)	318 (12.52)	22.75	16 x 1 1/8 - 7	419.1 (16.50)	114 (4.49)
	20	500	1160-X	310 (12.20)	217 (8.54)	244 (9.61)	76.2 (3.00)	480 (18.90)	348 (13.70)	25	20 x 1 1/8 - 7	457.2 (18.00)	127 (5.00)
	24	600	1250-X	310 (12.20)	217 (8.54)	244 (9.61)	76.2 (3.00)	562 (22.13)	444 (17.48)	29.5	20 x 1 1/4 - 7	558.8 (22.00)	154 (6.06)